Commodore

A 600

System Schematics

4/92

Commodore

Produced By:

Commodore International Spare Parts GmbH
Braunschweig, West Germany

SYSTEM SCHEMATICS

A600

APRIL, 1992 **PN-400422-02**

INTERNATIONAL EDITION

COMMODORE "INTERNATIONAL EDITION" SERVICE MANUALS CONTAIN PART NUMBER INFORMATION WHICH MAY VARY ACCORDING TO COUNTRY. SOME PARTS MAY NOT BE AVAILABLE IN ALL COUNTRIES.

Commodore Business Machines, Inc.
1200 Wilson Drive, West Chester, Pennsylvania 19380 U.S.A.

Commodore makes no express or implied warranties with regard to the information contained herein. The information is made available solely on an as is basis, and the entire risk as to completeness, reliability, and accuracy is with the user. Commodore shall not be liable for any damages in connection with the use of the information contained herein. The listing of any available replacement part herein does not constitute in any case a recommendation, warranty or guaranty as to quality or suitability of such replacement part. Reproduction or use without express permission, of editorial or pictorial content, in any matter is prohibited.

This manual contains copyrighted and proprietary information. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording or otherwise, without the prior written permission of Commodore Electronics Limited.

Copyright © 1992 by Commodore Electronics Limited.
All rights reserved. Printed in U.S.A.

TABLE OF CONTENTS

SECTION 1 — SPECIFICATIONS

SPECIFICATIONS 1-1

SECTION 4 — PARTS

BOARD LAYOUT 4-1
SHIPPING ASSEMBLY 4-2
MAIN ASSEMBLY 4-3
SHIPPING ASSEMBLIES 4-4
MAJOR ASSEMBLIES 4-5
PCB COMPONENTS 4-6

SECTION 5 — SCHEMATICS

SCHEMATIC #315987, REV. C 5-1

SECTION 1

SPECIFICATIONS

SPECIFICATIONS

INTRODUCTION

The A600 is a feature enhanced version of the A500 personal computer, in a smaller case with no numeric keypad.

FEATURES

CPU:	7.16MHz 68000 NTSC 7.09 MHz 68000 PAL
MEMORY:	512KB or 1MB internal expandable with additional 1MB external (A601)
KICKSTART ROM:	512K (V2.XX)
MASS STORAGE MEMORY:	Internal, 3.5 inch FDD mounted on the right side. The A600 HD will contain a 2.5″ IDE HDD.
ADDITIONAL FEATURES:	PCMCIA/JEIDA Standard, Memory and I/O card interface. IDE Hard Drive Interface (2.5″ form factor) Color Composite Video output RF Audio/Video Output

NEW ADDITIONS

1) 8375 FAT AGNUS which supports 2 Meg. of Chip RAM
2) 8373 ECS Denise
3) Full ECS support
4) V2.XX in ROM
5) Memory and I/O card interface
6) IDE Hard Drive Interface (2.5″)
7) Color Composite Video Output
8) RF Video/Audio Output

CUSTOM CHIPS

The A600 custom chip set has been repackaged in PLCC form for surface mounting application. The A600 will use the 8375 2MB Fat Agnus, the 8373 ECS Denise and the 8364R7 Paula Chip which remains functionally unchanged. Lastly, the A600 will use an enhanced version of the 5719 Gary chip called Gayle, which supports the memory, I/O card interface and the IDE Hard Drive interface.

EXTERNAL SYSTEM I/O

External floppy, Serial, Parallel, Mouse, Joystick, Stereo Audio Ports — these Ports remain unchanged from their A500 counterparts.

PC CARD
PCMCIA SIGNAL DESCRIPTIONS

No.	Ver. 3	No.	Ver. 3
1	GND	35	GND
2	D3	36	$\overline{CD1}$
3	D4	37	D11
4	D5	38	D12
5	D6	39	D13
6	D7	40	D14
7	$\overline{CE1}$	41	D15
8	A10	42	$\overline{CE2}$
9	$\overline{OE}$	43	($\overline{RFSH}$)
10	A11	44	(OP1)
11	A9	45	(OP2)
12	A8	46	A17
13	A13	47	A18
14	A14	48	A19
15	$\overline{WE/PGM}$	49	A20
16	(RDY/$\overline{BSY}$)	50	A21
17	VCC	51	VCC
18	VPP1	52	VPP2
19	A16	53	A22
20	A15	54	A23
21	A12	55	RFU
22	A7	56	RFU
23	A6	57	RFU
24	A5	58	RFU
25	A4	59	RFU
26	A3	60	RFU
27	A2	61	($\overline{REG}$)
28	A1	62	OP3
29	A0	63	BVD1
30	D0	64	D8
31	D1	65	D9
32	D2	66	D10
33	WP	67	$\overline{CD2}$
34	GND	68	GND

IDE SIGNAL DESCRIPTIONS

Pin	Signal	Pin	Signal
1	−Host reset	2	Ground
3	+Host data 7	4	+Host data 8
5	+Host data 6	6	+Host data 9
7	+Host data 5	8	+Host data 10
9	+Host data 4	10	+Host data 11
11	+Host data 3	12	+Host data 12
13	+Host data 2	14	+Host data 13
15	+Host data 1	16	+Host data 14
17	+Host data 0	18	+Host data 15
19	Ground	20	Key
21	Reserved	22	Ground
23	−Host Low	24	Ground
25	−Host IOR	26	Ground
27	Reserved	28	+Host ALE
29	Reserved	30	Ground
31	+Host IRQ 14	32	−Host IO 16
33	+Host Addr 1	34	−Host PIAG
35	+Host Addr 0	36	+Host Addr 2
37	−Host CS 0	38	−Host CS 1
39	−Host SLV/ACT	40	Ground

SECTION 4

PARTS

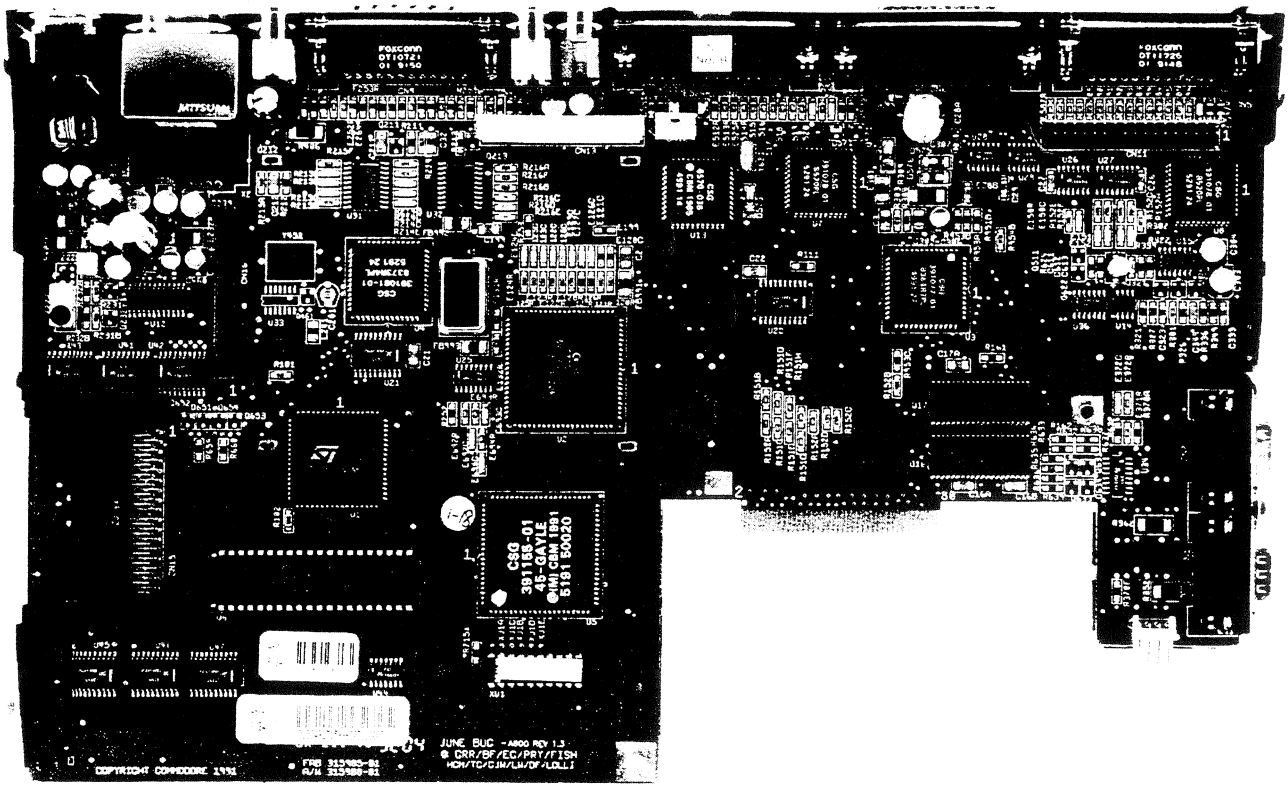

KEY COMPONENTS

Ref.	Chip	Description	Part Number
U1	68000	68000 Processor 8MHz	390084-01
U2	8375	ECS Agnus A300/A500+	390544-01
U3	8364	Paula	391077-01
U4	8373	ECS Denise	391081-01
U5	4145-20	Gayle Gate Array	391155-01
U6	ASST	ROM 256Kx16, 200ns	391304-01
U7-8	8520	Amiga VIA. 1 MHz	391078-01
U10-11	28F10	Flash Memory 128Kx8	
U12	CXA1145	Sony Video Encoder	391084-01
U13	6570-30	Amiga Keyboard MPU	391079-01
U14	NE555	Reset Timer	391104-01
U16-17	ASST	Dram 256Kx16, 120ns	391105-01
U15	LF347	Bimos Op-Amp	391103-01
	TL084	Bimos Op-Amp	391103-01
U28	1488	EIA Line Driver	391087-01
U29	1489	EIA Line Receiver	391086-01
X1	OSC	TTL 28.63636 MHz NTSC	325566-14
	OSC	TTL 28.37512 MHz PAL	252344-01
Y451	XTAL	4.43619 MHz PAL Burst	252345-01
Y621	XTAL	3 MHz Ceramic Resonator	391156-01
X2	ASST	PAL Video Modulator	313371-05
	ASST	NTSC Video Modulator	313371-01

CONNECTORS

Ref.	Type	Description	Part Number
CN1	DB9P	Mouse/Joystick 1	390242-01
CN2	DB9P	Mouse/Joystick 2	390242-01
CN3	RCA-J	Right Audio Output	252122-02
CN4	RCA-J	Left Audio Output	252122-01
CN5	DB23S	External Floppy	390241-03
CN6	DB25P	RS232 Serial Port	
CN7	DB25S	Parallel Printer Port	390241-05
CN8	SQ DIN	Power Supply Connector	252167-01
CN9	DB23P	Video Output	390242-03
CN10	RCA-J	Composite Video	252122-01
CN11	DIL-34	Internal Floppy Signal	903345-17
CN12	SIL-4	Internal Floppy Power	325516-04
CN13	MEM-30	Keyboard Membrane	390492-02
CN14	SIL-4	Internal Floppy Power	
CN13	MEM-30	Keyboard Membrane	
CN14	SIL-4	Keyboard Status LED's	391314-01
CN15	PCMCIA	PC "Memory Card"	391073-01
P9	EDGE-80	Memory Bus Expansion	

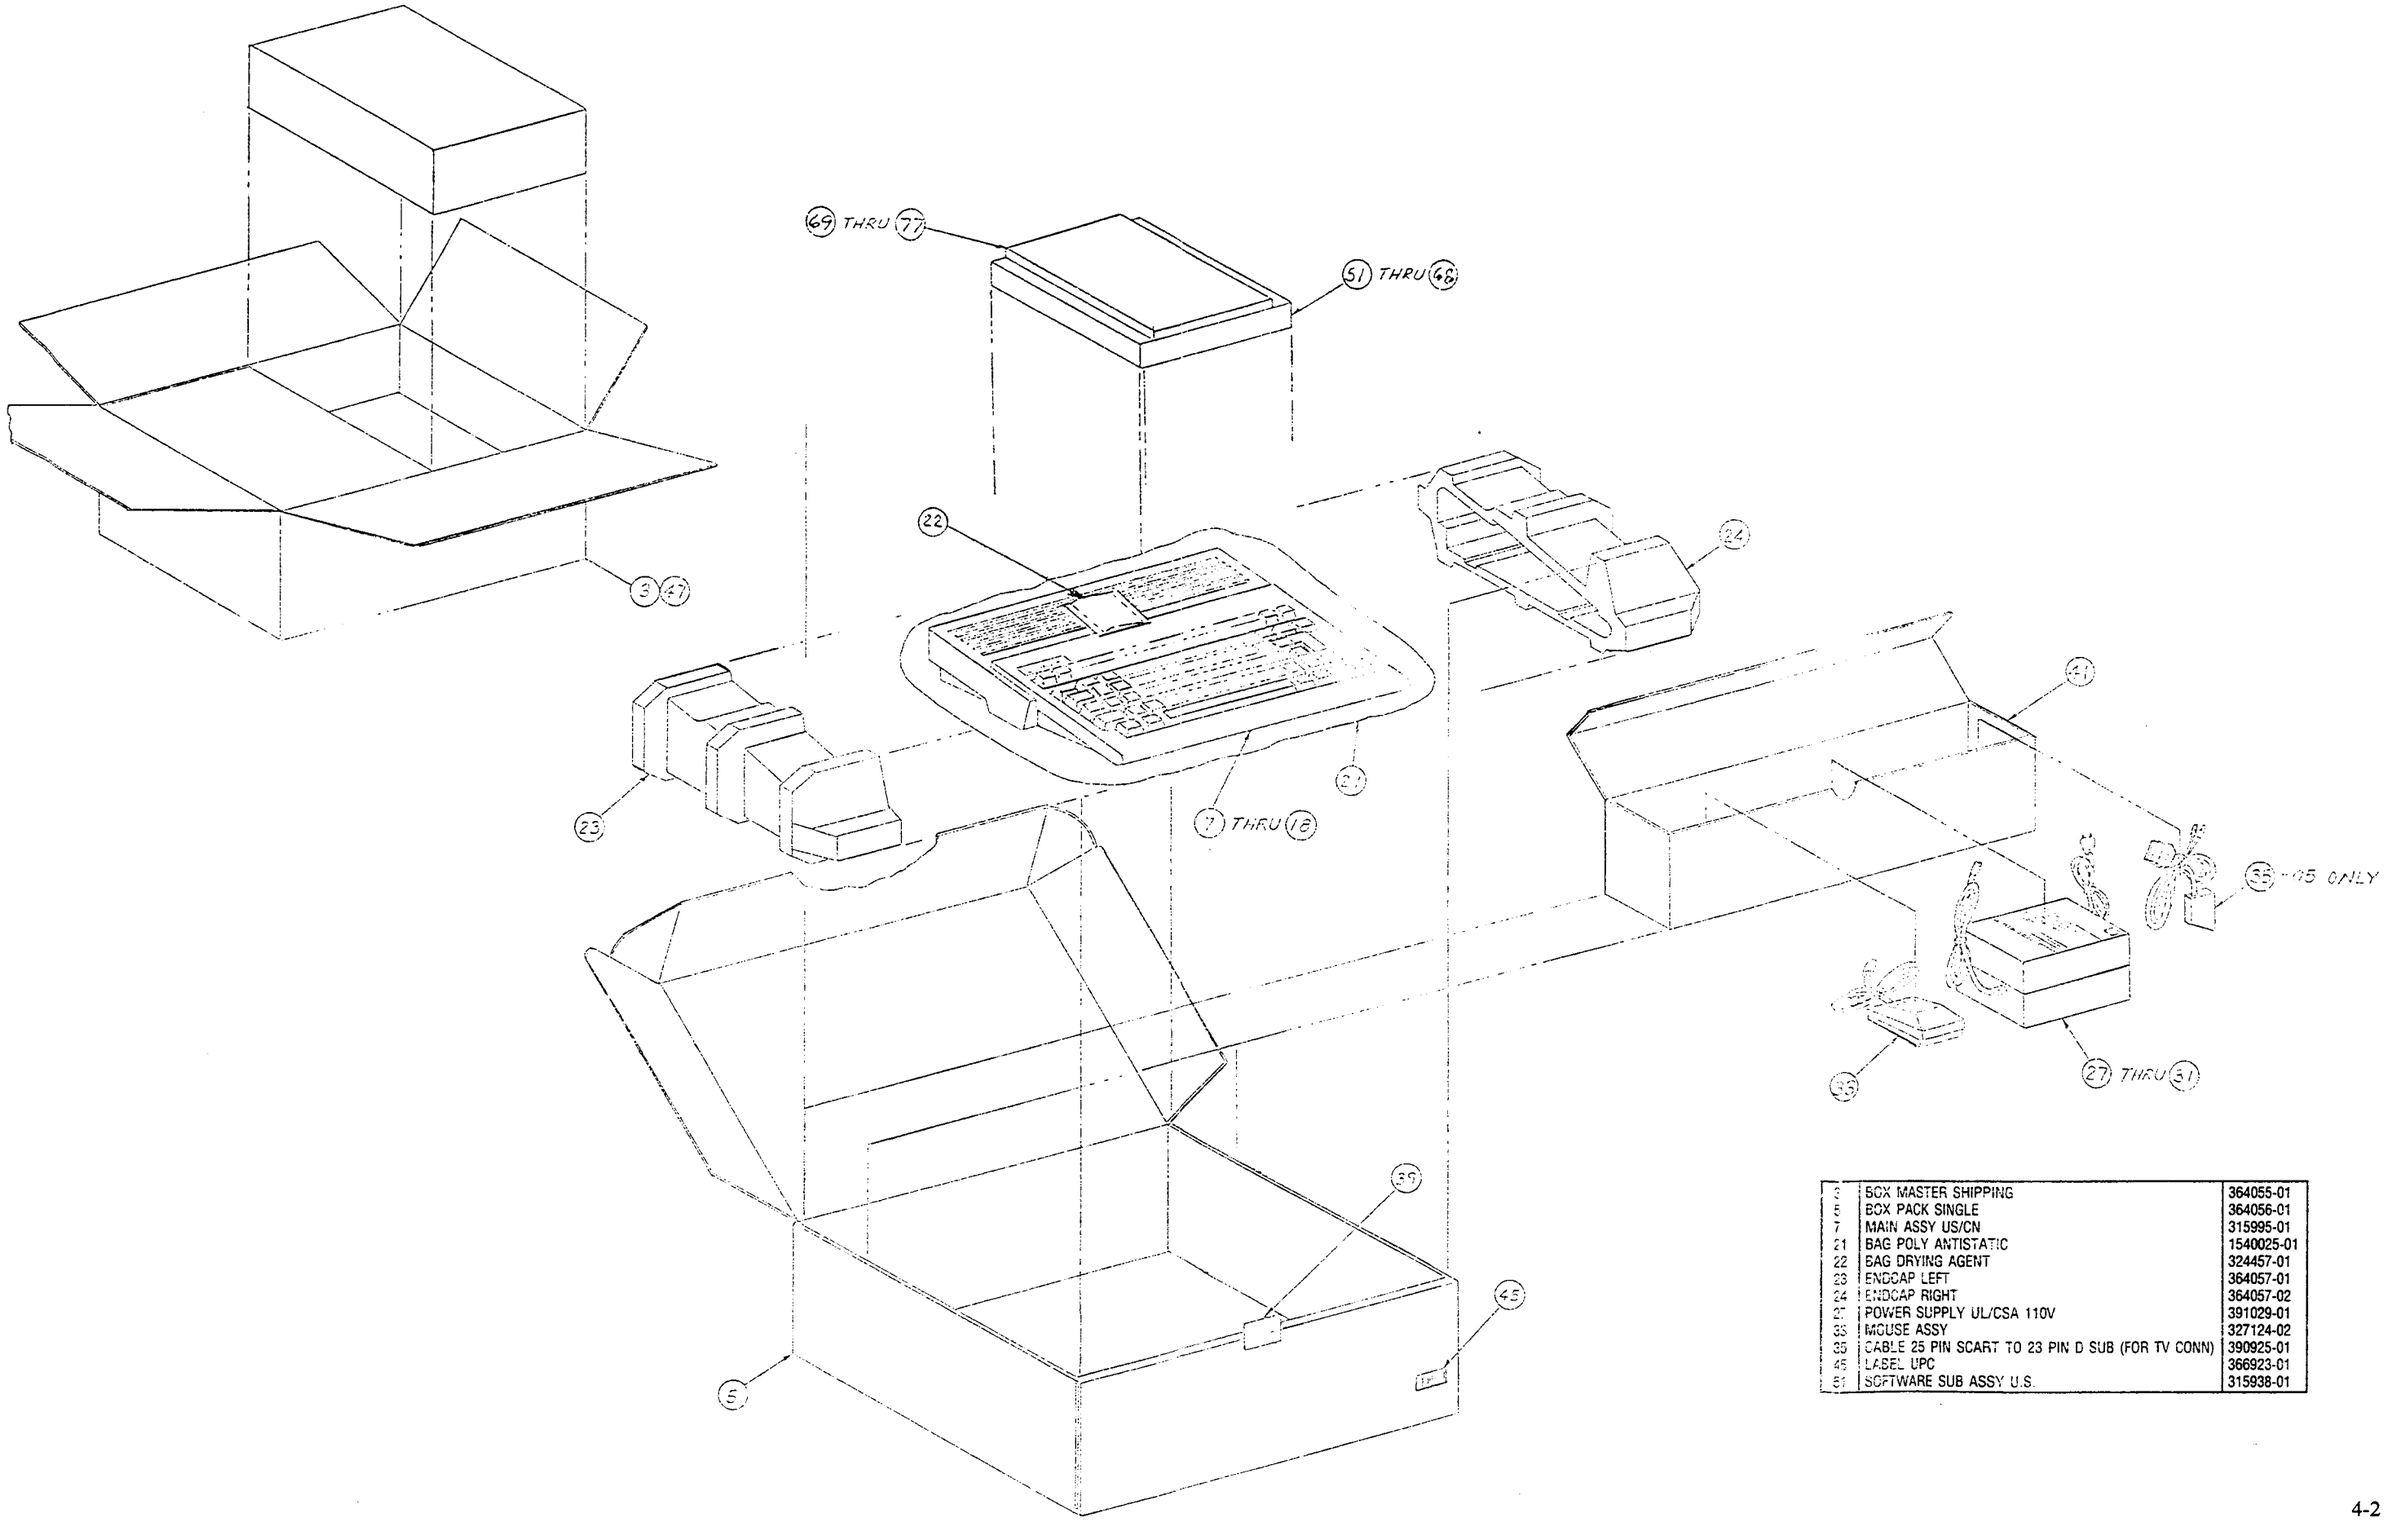

3	BOX MASTER SHIPPING	364055-01
5	BOX PACK SINGLE	364056-01
7	MAIN ASSY US/CN	315995-01
21	BAG POLY ANTISTATIC	1540025-01
22	BAG DRYING AGENT	324457-01
23	ENDCAP LEFT	364057-01
24	ENDCAP RIGHT	364057-02
27	POWER SUPPLY UL/CSA 110V	391029-01
33	MOUSE ASSY	327124-02
35	CABLE 25 PIN SCART TO 23 PIN D SUB (FOR TV CONN)	390925-01
45	LABEL UPC	366923-01
51	SOFTWARE SUB ASSY U.S.	315938-01

Main Assembly

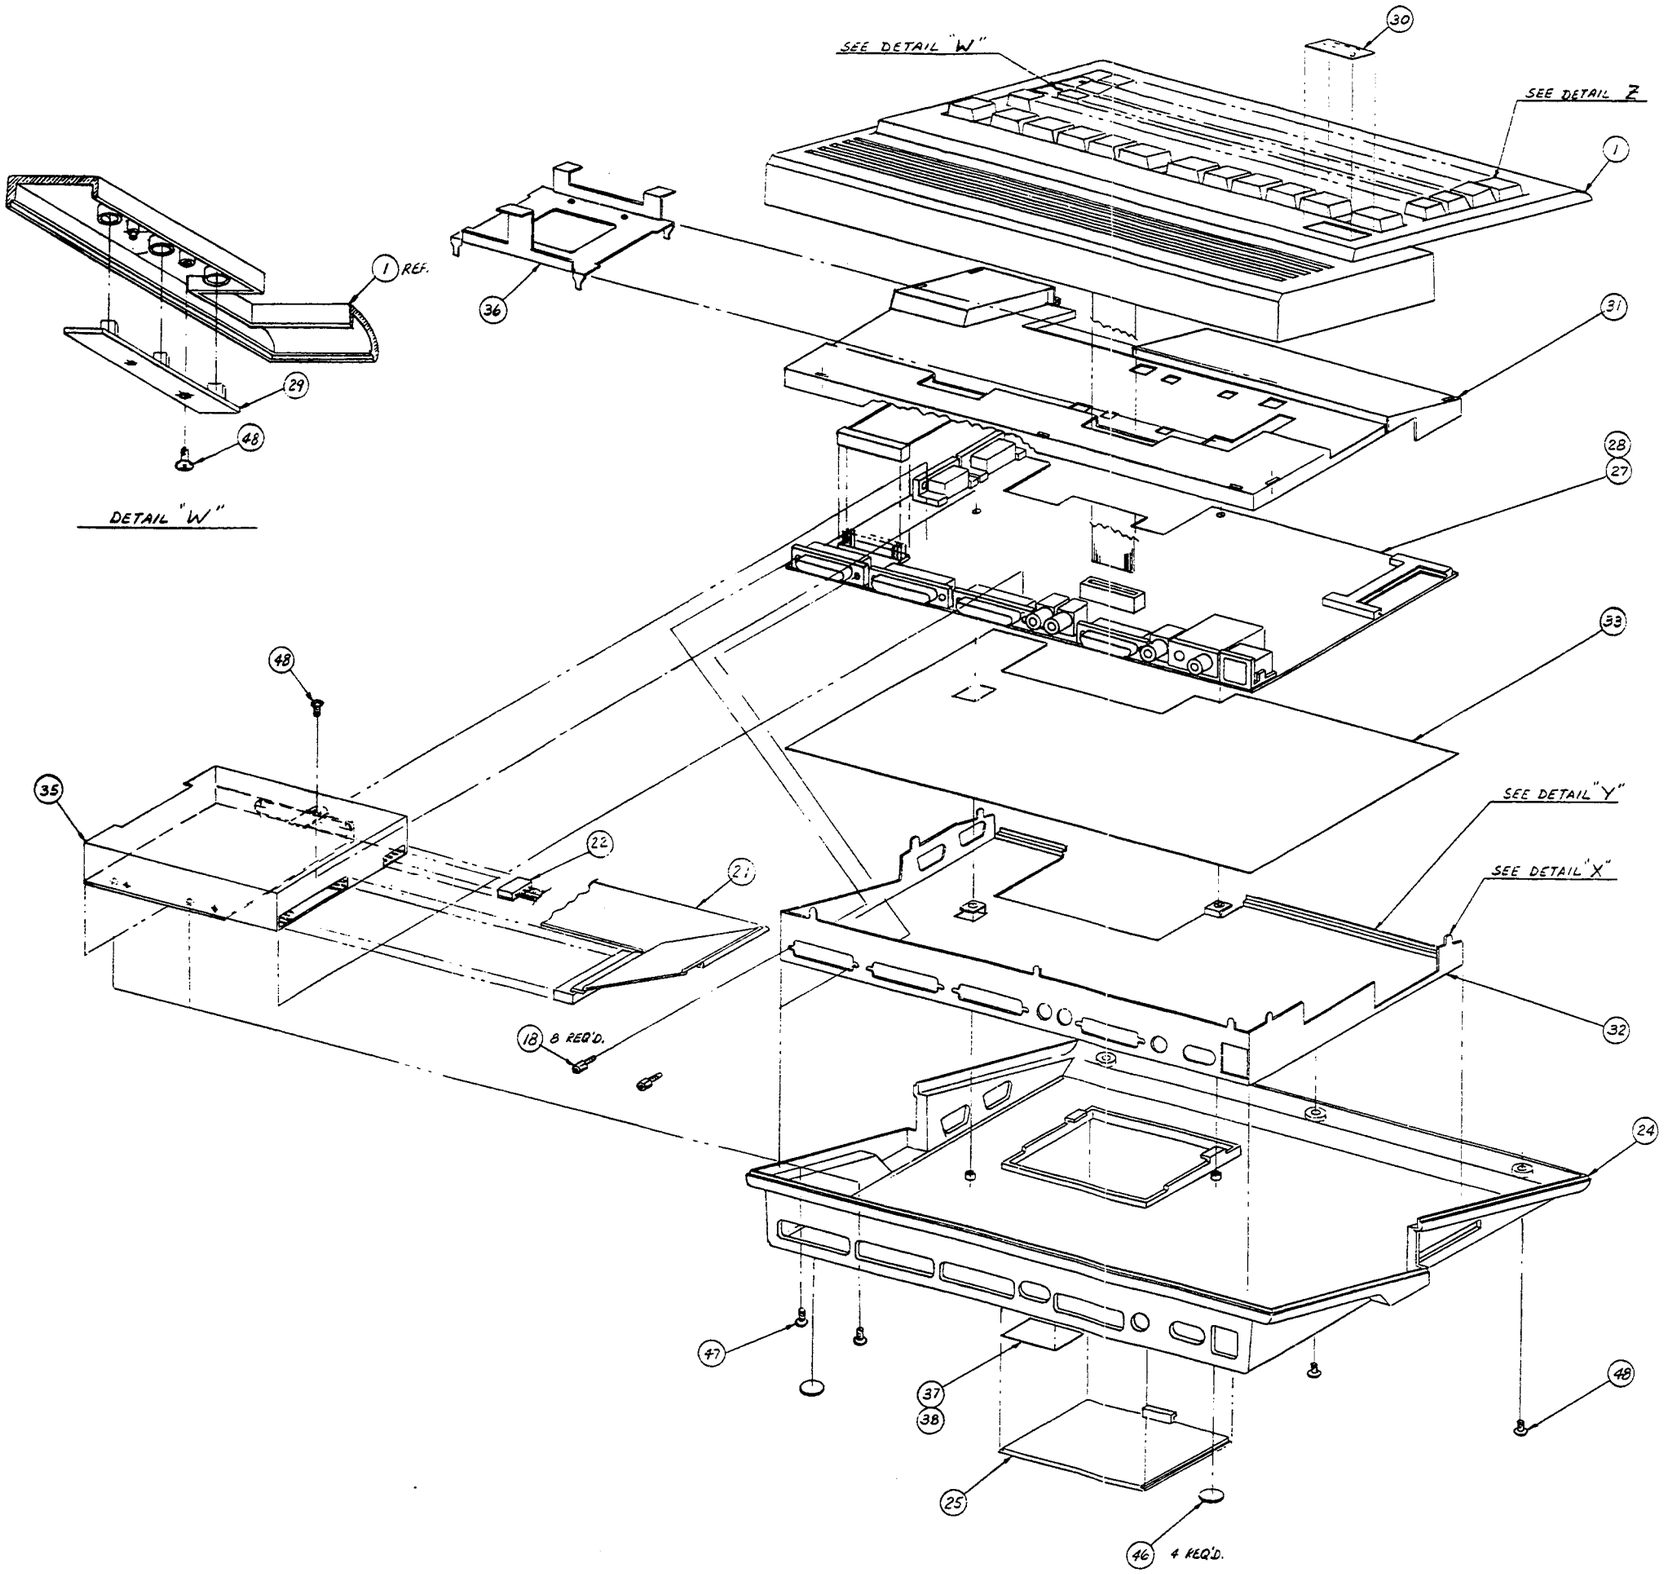

DETAIL "W"

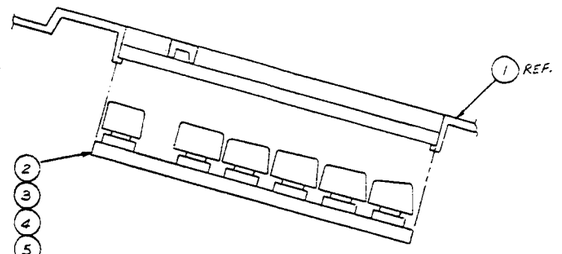

DETAIL "Z"



DETAIL "X"



DETAIL "Y"

1	TOP CASE	363786-01
18	JACKPOST STANDOFF (QTY 8)	390251-01
21	CABLE ASSY FLOPPY DISK DRIVE	364423-01
22	HARNESS DISK POWER ASSY	327207-02
24	BOTTOM CASE	363787-01
25	RAM DOOR	363899-01
27	PCB ASSY NTSC	315986-01
28	PCB ASSY PAL	315986-02
29	LED ASSY	315992-01
30	NAMEPLATE A600	363951-01
31	TOP SHIELD	363788-01
32	BOTTOM SHIELD	363789-01
33	INSULATION SHEET	363790-01
34	BRACKET SUPPORT FDD	363795-01
35	DRIVE FLOPPY DISK 3.5"	363914-01
36	SUPPORT HARD DISK DRIVE	363969-01
37	LABEL RATING & SERIAL PAL	366800-01
38	LABEL RATING & SERIAL NTSC	366800-02
46	FEET RUBBER WHITE (QTY 4)	950150-01
47	SCREW 3M X 6.0MM MACH PHL PH (QTY 4) FASTEN FDD TO BOTTOM CASE	906800-05

Commodore International Spare Parts List
SHIPPING ASSEMBLIES

Commodore part numbers are provided for reference only and do not indicate the availability of spare parts from Commodore. Industry standard parts (Resistors, Capacitors, Connectors) should be secured locally. Part number information may vary according to country, some parts may not be available in all countries. Part Numbers are subject to change.

A600 SHIPPING ASSY	
530300-01	U.S.
530300-02	CN
530300-03	U.K.
530300-04	GR
530300-05	FR
530300-06	IT
530300-07	SP
530300-08	SG
530300-09	SF
530300-10	AU NOT USED
530300-11	NR
530300-12	SD
530300-13	FN
530300-14	NE
530300-15	DN
530300-16	BF
530300-17	BD
530300-18	AL
530300-19	CEL
530300-20	PG
364055-01	BOX MASTER SHIPPING
364056-01	BOX PACK SINGLE
315995-01	MAIN ASSY US/CN
315995-02	MAIN ASSY GR/AU
315995-03	MAIN ASSY FR/BE
315995-04	MAIN ASSY SD/FN
315995-05	MAIN ASSY SP
315995-06	MAIN ASSY DN
315995-07	MAIN ASSY SEV
315995-08	MAIN ASSY NR
315995-09	MAIN ASSY NE
315995-10	MAIN ASSY UK/AL
315995-11	MAIN ASSY IT
315995-12	MAIN ASSY PG
1540025-01	BAG POLY ANTISTATIC
324457-01	BAG DRYING AGENT
364057-01	ENDCAP LEFT
364057-02	ENDCAP RIGHT
391029-01	POWER SUPPLY UL/CSA 110V

A600 SHIPPING ASSY *(Continued)*	
391029-02	POWER SUPPLY BSI 240V
391029-03	POWER SUPPLY VDE 220V
391029-04	POWER SUPPLY SEV 220V
391029-05	POWER SUPPLY SAA 220V
327124-02	MOUSE ASSY
390925-01	CABLE 25 PIN SCART TO 23 PIN D SUB (FOR TV CONN)
364346-01	BOX ACCESSORY
364342-01	SPACER CARDBOARD
364342-02	SPACER CARDBOARD
318143-02	GLUE WHITE
366923-01	LABEL UPC
368084-01	SEAL TAMPER EVIDENT (2 ON SINGLE PACK BOX FLAPS)
999104-01	TAPE ADHESIVE TRANSPARENT 50MM
315938-01	SOFTWARE SUB ASSY U.S.
315938-02	SOFTWARE SUB ASSY CN
315938-03	SOFTWARE SUB ASSY UK
315938-04	SOFTWARE SUB ASSY GR
315938-05	SOFTWARE SUB ASSY FR
315938-06	SOFTWARE SUB ASSY IT
315938-07	SOFTWARE SUB ASSY SP
315938-08	SOFTWARE SUB ASSY SG
315938-09	SOFTWARE SUB ASSY SF
315938-10	SOFTWARE SUB ASSY NR
315938-11	SOFTWARE SUB ASSY SD
315938-12	SOFTWARE SUB ASSY FN
315938-13	SOFTWARE SUB ASSY NE
315938-14	SOFTWARE SUB ASSY DN
315938-15	SOFTWARE SUB ASSY BF
315938-16	SOFTWARE SUB ASSY AL
368435-01	MANUAL INTRODUCING THE A600 ENGLISH
368436-01	MANUAL INTRODUCING THE A600 GERMAN
368437-01	MANUAL INTRODUCING THE A600 FRENCH
368438-01	MANUAL INTRODUCING THE A600 ITALIAN
368439-01	MANUAL INTRODUCING THE A600 SPANISH
368440-01	MANUAL INTRODUCING THE A600 NORWEGIAN
368441-01	MANUAL INTRODUCING THE A600 SWEDISH
368443-01	MANUAL INTRODUCING THE A600 DUTCH
368444-01	MANUAL INTRODUCING THE A600 DANISH

Commodore International Spare Parts List
A600 MAJOR ASSEMBLIES

Commodore part numbers are provided for reference only and do not indicate the availability of spare parts from Commodore. Industry standard parts (Resistors, Capacitors, Connectors) should be secured locally. Part number information may vary according to country, some parts may not be available in all countries.

315995-01	MAIN ASSY US/CN	315986-02	PCB ASSY PAL
315995-02	MAIN ASSY GR/AU	315986-03	PCB NTSC 1M
315995-03	MAIN ASSY FR/BE	315992-01	LED ASSY
315995-04	MAIN ASSY SD/FN	363951-01	NAMEPLATE A600
315995-05	MAIN ASSY SP	363788-01	TOP SHIELD
315995-06	MAIN ASSY DN	363789-01	BOTTOM SHIELD
315995-07	MAIN ASSY SEV	363790-01	INSULATION SHEET
315995-08	MAIN ASSY NR	363795-01	BRACKET SUPPORT FDD
315995-09	MAIN ASSY NE	363914-01	DRIVE FLOPPY DISK 3.5"
315995-10	MAIN ASSY UK/AL	363969-01	SUPPORT HARD DISK DRIVE
315995-11	MAIN ASSY IT	366800-01	LABEL RATING & SERIAL PAL
315995-12	MAIN ASSY PG	366800-02	LABEL RATING & SERIAL NTSC
363786-01	TOP CASE	366800-03	LABEL RATING & SERIAL PAL (SUBSTITUTE)
363756-01	KEYBOARD ASSY US/CN	366800-04	LABEL RATING & SERIAL NTSC (SUB)
363756-04	KEYBOARD ASSY GERMAN	366800-05	LABEL RATING & SERIAL PAL (SUB)
363756-05	KEYBOARD ASSY FRENCH	366800-06	LABEL RATING & SERIAL NTSC (SUB)
363756-12	KEYBOARD ASSY SWEDISH/FINNISH	366800-07	LABEL RATING & SERIAL PAL (SUB)
363756-07	KEYBOARD ASSY FINNISH	366800-08	LABEL RATING & SERIAL NTSC (SUB)
363756-15	KEYBOARD ASSY DANISH	950150-01	FEET RUBBER WHITE (QTY 4)
363756-08	KEYBOARD ASSY SWISS	906800-05	SCREW 3M X 6.0MM MACH PHL PH (QTY 4) FASTEN FDD TO BOTTOM CASE
363756-11	KEYBOARD ASSY NORWEGIAN		
363756-03	KEYBOARD ASSY UK/AUSTRALIA	906883-01	SCREW 3M X 6.0MM SELF TAPPING (QTY 4) FASTEN PCB, FDD BKT TO BOTTOM CASE
363756-06	KEYBOARD ASSY ITALIAN		
363756-20	KEYBOARD ASSY PORTUGUESE	364075-01	SCHEMATIC
363756-99	KEYBOARD ASSY BLANK	391033-02	LED GREEN
390251-01	JACKPOST STANDOFF (QTY 8)	391033-01	LED YELLOW
390251-03	JACKPOST STANDOFF (SUB FOR 390251-01)	391315-01	CONNECTOR HOUSING 4 POSITION
324530-02	JACKPOST STANDOFF (SUB FOR 390251-01)	391316-01	PIN
363787-01	BOTTOM CASE	903756-10	WIRE AWG #24 BLACK 200MM LG.
363899-01	RAM DOOR	903756-02	WIRE AWG #24 RED 200MM LG.
364423-01	CABLE ASSY FLOPPY DISK DRIVE	903756-03	WIRE AWG #24 ORANGE 200MM LG.
327207-02	HARNESS DISK POWER ASSY	903756-05	WIRE AWG #24 GREEN 200MM LG.
315986-01	PCB ASSY NTSC		

A601 RAM EXPANSION

580300-01	512K	580300-02	1M

HARD DRIVE ACCESSORIES

368681-01	INTRO MANUAL	906600-01	SCREW (QTY 4)
368712-01	MANUAL USERS	367826-01	DISK INSTALL 204
312896-01	HDD ASSY	363951-02	NAMEPLATE A600HD
364435-01	CABLE HDD		

Commodore International Spare Parts List
PCB Components
PCB Assembly A600

Commodore part numbers are provided for reference only and do not indicate the availability of spare parts from Commodore. Industry standard parts (Resistors, Capacitors, Connectors) should be secured locally. Part number information may vary according to country, some parts may not be available in all countries.

IC COMPONENTS		
390084-01	CPU MC68000FN8 8MHZ 68PIN PLCC	U1
390544-02	8375R0 AGNUS HR NTSC 84 PIN PLCC	U2
390544-01	8375R0 AGNUS HR PAL 84PIN PLCC	U2
391155-01	4145R0F020 GAYLE 84PIN PLCC	U5
391081-01	8375R4 DENISE HR 52PIN PLCC	U4
391077-01	8364R7 PAULA 52PIN PLCC	U3
391079-01	6571R4 KEYBD UP 44PIN PLCC	U13
391078-01	8520R4 CIA 44PIN PLCC 1MHZ	U7,U8
391144-01	74HCT244 SM	U31,U32
391139-01	74F00 SM	U26
391140-01	74F27 SM	U36
391141-01	74LS74A SM PAL	U33
391218-01	74F02 SM	U44
391142-01	74LS245 SM	U21,U22,U41-U43,U45-U47
391085-01	74LS157 SM	U34
391176-01	74F139 SM	U27
391099-01	74F258 SM	U25
390071-03	PAL 16L8B BLANK (WILL BE USED ONLY TEMPORARILY W/REV 0 GAYLE)	
391087-01	INTERFACE MC1488D SM	U28
391086-01	INTERFACE MC1489D SM	U29
391103-01	LINEAR LF347/TL084ACD SM	U15
391104-01	LINEAR NE555 SM	U14
391105-01	DRAM 256K X 16 80NS SM	U16,U17
391304-01	ROM KICKSTART V2.0 40PIN DIP	U6
391084-01	VIDEO ENCODER CXA1145M SM	U12

CONNECTORS		
390241-03	D SUB 23 PIN FEMALE DB23S	CN5 EXTERNAL FLOPPY
390242-03	D SUB 23 PIN MALE DB23P	CN9 RGB VIDEO
390241-05	D SUB 25 PIN FEMALE DB25S	CN7 PARALLEL PRINTER PORT
390242-01	D SUB 9 PIN MALE DB9P	CN1,CN2,MOUSE/JOY-STICK
252122-01	RCA JACK YELLOW	CN10,COLOR COM-POSITE VIDEO
252122-01	RCA JACK WHITE	CN4 LEFT AUDIO
252122-02	RCA JACK BLACK	CN3 RIGHT AUDIO
252167-01	DIN 5 PIN SQUARE	CN8 CPU POWER
325516-04	SIL 4PIN HEADER	CN12,FLOPPY POWER/LED
903345-17	DIL 34PIN HEADER W/KEY (PIN3)	CN11 FLOPPY SIGNAL
391153-01	DIL 44PIN HEADER W/KEY (PIN20)	CN16 HDD
391073-01	68 PIN RIGHT ANGLE HIGH DENSITY	CN15 CREDIT CARD
390492-02	30 PIN LOCKING ZIF FFC	CN13 KEYBOARD
391314-01	HEADER RT ANGLE 4 PIN POLARIZED	CN14 LED

TRANSISTORS AND DIODES		
391145-01	TRANS JFET MPF102/PN4302 SOT23	Q321,Q331
391121-01	TRANS NPN 2N3904 SOT23	Q211-Q213,Q231-Q233, Q511,Q571,Q621,Q622, Q651,Q653,(Q461 PAL)
391122-01	TRANS PNP 2N3906 SOT23	Q341,Q631-Q633,Q652, Q654
391129-01	DIODE 1N4148 SOT23	D571
391128-01	DIODE 1N914 SOT23 (SUB FOR 391129-01)	D571
391327-01	DIODE 1N4001 MELF	D572-D576

RESISTORS — 1/8W 5% UNLESS OTHERWISE SPECIFIED		
310026-26	SM 0 OHM (1206) NTSC JUMPERS	E321R,E331R,R202, R225,(R624-R626 NOT STUFFED)
310026-26	SM 0 OHM (1206) PAL JUMPERS	E321R,E331R,R203 (R624-R626 NOT STUFFED)
310026-10	SM 27 OHM (1206)	R113,R114,R152B-R152H,E112R,E120R-E129R,E150R
310026-01	SM 47 OHM (1206)	E253R-E256R,E577R, E561R,E562R,E524R

RESISTORS — 1/8W 5% UNLESS OTHERWISE SPECIFIED *(Continued)*		
310026-12	SM 68 OHM (1206)	E131R,E132R,E251R, E252R,E257R,E261R, E262R,E266R,E267R, E351R,E353R-E358R, E361R,E363R-E368R, E371R-E374R,E511R-E523R,E525R,E551R-E556R,E558R,E581R-E596R,E692R-E694R, R151A-R151H,R152A
310026-29	SM 75 OHM (1206)	R232E,R234A-R234D
310026-05	SM 100 OHM (1206)	R237,R622,R639
310026-24	SM 120 OHM (1206)	R236,R714A,R714B
310026-13	SM 150 OHM (1206)	R211-R213,R233A-R233C
310026-40	SM 270 OHM (1206)	R214A,R215A,R216A
310022-22	SM 330 OHM (1206)	R214F,R215F,R216F
310026-14	SM 360 OHM (1206)	R235,R321,R331
310026-15	SM 390 OHM (1206)	R325,R335
310026-21	SM 470 OHM (1206)	R111,R161,R162,R515, R659,R660,R952,R953A-R953C
310026-11	SM 820 OHM (1206)	R224
310026-07	SM 1K OHM (1206)	R101,R102,R222,R223, R303,R304,R319,R324, R334,R511D,R103,R512, R621,R654,R954A, R954B,R231A-R231C, R238,R214B,R215B, R216B (R244)
310026-25	SM 1.5K (1206)	R221
310026-32	SM 2K OHM (1206)	R214C,R215C,R216C
310026-16	SM 2.7K OHM (1206)	R347,R571
310026-08	SM 4.7K OHM (1206)	R251-R253,R348,R632, R634,R636,R655,R951A-951F,R370A-370H,R651, R719,R514,R715X (R241)
310026-17	SM 10K OHM (1206)	R322,R323,R327,R329, R332,R333,R337,R339, R346,R511A-R511C, R511F,RR511I,R637, R572,R623,R631,R633, R635,R652,R653,R656, R657,R715A-R715H, R716-R718 (R243)
310026-23	SM 22K OHM (1206)	R345
310026-27	SM 27K OHM (1206)	R459
310026-18	SM 33K OHM (1206)	R232A-R232C,R349
310026-03	SM 47K OHM (1206)	R612
310026-19	SM 470K OHM (1206)	R326,R336
310026-20	SM 1M OHM (1206)	R611
310026-09	SM 10 OHM (1206)	R301,R302
310026-35	SM 6.8K OHM (1206)	(R242 FOR PAL)
310026-41	CHIP SM 1.8K (1206)	(R245 FOR PAL) R246 NTSC
310026-42	CHIP SM 180 OHM (1206)	(R236 FOR PAL)
391154-01	SM 4.02K OHM (1206) 1/8W 1%	R214D,R215D,R216D
391154-02	SM 8.06K OHM (1206) 1/8W 1%	R214E,R215E,R216E
391154-03	SM 1K (1206) 1/8W 1%	R214B,R215B,R216B
391154-04	SM 2K (1206) 1/8W 1%	R214C,R215C,R216C
391093-01	SM 1 OHM (2512) 1W 5%	R309,R405A,R405B
391093-02	SM 4.7 OHM (2512) 1W 5%	E232R,R352,R362,R406
391093-04	SM 47 OHM (2512) 1W 5%	E524R

CAPACITORS		
390818-03	SM NPO 15PF (1206)	(C242 PAL)
390818-04	SM NPO 47PF (1206)	E258C-E260C,E-692C, E693C,E150C,E151-E154, E694C
390818-05	SM NPO 56PF (1206)	C245, (C241 PAL)

Commodore International Spare Parts List
PCB Components *(Continued)*
PCB Assembly A600

CAPACITORS *(Continued)*		
390818-06	SM NPO 100PF (1206)	E231C,E251C-E257C, E261C,E262C,E266C, E267C,E511C-E523BC, E525C,E551C,E552C, E558C,E581C-E596C
390853-06	SM X7R 470PF (1206)	E351C,E353C,E354C, E361C,E363C,E364C, E371C-E374C,E553C-E556C
390853-07	SM X7R 1000PF (1206)	(C243 PAL)
390853-08	SM X7R 3900PF (1206)	C323,C333
390853-09	SM X7R 6800PF (1206)	E321C,E331C,C322,C332, E355C-E358C,E365C-E368C
390853-01	SM X7R .01UF (1206)	C246,C26,C27,C28A, C28B,C29,C33,C34,C36, C349,E597C,E598C,C591, C613,C800-C803,E232C, E263C-E265C,E524C, E557C,E561C,E562C, C592,C7,C8, (C244 PAL)
390853-04	SM X7R .047UF (1206)	C311-C314,C352
310027-02	SM Z5U .1UF (1206)	C221,C222,C362,C611, (C321,C331,NOT STUFFED)
390797-01	SM Z5U .33UF (1210)	C12A,C12B,C13,C14, C16A,C16B,C17A,C17B, C1A,C1B,C2-C4,C21, C211-C213,C22,C25, C301,C302,C305,C31, C41-C43,C32,C551,C552, C5A,C5B,C6,C701,C702, C711,C804,C199,C44-C47

CAPACITORS *(Continued)*		
390818-01	SM NPO 22PF (1206)	E112C,E122C-E129C, C621,C622
391097-07	ALUM ELECT 10UF 25V SM (C)	C214,C306,C460,C612
391097-08	ALUM ELECT 22UF 25V SM (D)	C303,C304,C324,C334, C459
391097-04	ALUM ELECT 47UF 16V SM (D)	C821,C822
391097-01	ALUM ELECT 100UF .63V SM (D)	C235,C236,C239,C409
390101-10	ALUM ELECT 1000UF 10V	C408,C811
390101-03	ALUM ELECT 470UF 16V	C237,C307
MISCELLANEOUS		
391092-01	FILTER CHIP FERRITE BEAD LARGE (1812)	E301,FB991-FB993
391092-01	FILTER CHIP FERRITE BEAD MEDIUM (1206)	E231R,E258R-E260R, E263R-E265R,E597R, E598R
251878-02	LINE FILTER	LF 1
391146-02	BANDPASS FILTER NTSC (F-K5-MS)	Z221
391147-02	DELAY LINE NTSC (F K5 MD)	Z222
391146-01	BANDPASS FILTER PAL (BPF K5 MS)	Z221
391147-01	DELAY LINE PAL (F KS MT)	Z222
391138-01	INDUCTOR SM 1.2UH (1206)	(L241)
391156-01	RESONATOR CERAMIC 3.00 MHZ	Y621
252345-01	XTAL 4.433619 MHZ	(Y451)
325566-14	OSCILLATOR 28.63636 MHZ NTSC	X1
252344-01	OSCILLATOR 28.37516 MHZ PAL	(X1)
904150-09	SOCKET 42 PIN DIP	U6
313371-01	MODULATOR MDG VA3424 NTSC	X2
313371-05	MODULATOR MDG UD 3626 PAL	(X2)
366648-01	LABEL BAR CODE BLANK 0.5" X 1.75"	
366649-01	LABEL BAR CODE BLANK 0.5" X 1.00"	

SECTION 5

SCHEMATICS

JUMPERS AND STUFF

REF	TYPE	DESCRIPTION	PAGE
R246	SMT	NTSC COLOR BURST	4
R202	SMT	PAL COLOR BURST	4
R625	SMT	KEYBOARD MPU CLOCK	9
R624	SMT	KEYBOARD/SYSTEM RESET	9

CONNECTORS

REF	TYPE	DESCRIPTION	PAGE
CN1	DB9P	MOUSE/JOYSTICK 1	5
CN2	DB9P	MOUSE/JOYSTICK 2	5
CN3	RCA-J	RIGHT AUDIO OUTPUT	5
CN4	RCA-J	LEFT AUDIO OUTPUT	5
CN5	DB23S	EXTERNAL FLOPPY	8
CN6	DB25P	RS232 SERIAL PORT	7
CN7	DB25S	PARALLEL PRINTER PORT	7
CN8	SQ DIN	POWER SUPPLY CONNECTOR	13
CN9	DB23P	VIDEO OUTPUT	6
CN10	RCA-J	COMPOSITE VIDEO	4
CN11	DIL-34	INTERNAL FLOPPY SIGNAL	8
CN12	SIL-4	INTERNAL FLOPPY POWER	8
CN13	MEM-30	KEYBOARD MEMBRANE	9
CN14	SIL-4	INTERNAL FLOPPY POWER	8
CN13	MEM-30	KEYBOARD MEMBRANE	9
CN14	SIL-4	KEYBOARD STATUS LED'S	9
CN15	PCMCIA	PC "MEMORY CARD"	11
P9	EDGE-80	MEMORY BUS EXPANSION	12

SIGNAL GLOSSARY

SIGNAL	DESCRIPTION (AREA)	PAGES
28MHZ	28.63636 MHZ MASTER CLOCK	
7MHZ	7.15909 MHZ PROCESSOR CLOCK	
A[23:1]	PROCESSOR ADDRESS BUS (68000)	
ACK	DATA ACKNOWLEDGE (PARALLEL PORT)	
AS	ADDRESS STROBE (68000)	
AUDIN	AUDIO INPUT (RS232 PORT)	
AUDOUT	AUDIO OUTPUT (RS232 JACK)	
BEER	BUS ERROR (68000)	
BG	BUS GRANT (68000)	
BGACK	BUS GRANT ACKNOWLEDGE (68000)	
BLISS	BLITTER SLOWDOWN (CHIPS)	
BLIT	CHIP MEMORY ACCESS (CHIPS)	
BR	BUS REQUEST (68000)	
BUSY	DEVICE BUSY (PARALLEL PORT)	
CASL/U	COLUMN ADDRESS STROBE (DRAM)	
CCK/CCKQ	COLOR CLOCK / QUADRATURE (CHIPS)	
CDAC	7.15909 MHZ QUADRATURE CLOCK (CHIPS)	
CHNG	MEDIA CHANGE (FLOPPY)	
CLKRD/WR	READ-TIME CLOCK READ / WRITE (RTC)	
COMP	MONOCHROME COMPOSITE VIDEO (VIDEO)	
CSYNC	COMPOSITE SYNC (VIDEO)	
CTS	CLEAR TO SEND (RS232 PORT)	
D[15:0]	PROCESSOR DATA BUS (68000)	
DIR	STEP DIRECTION (FLOPPY)	
DKRD	DISK READ DATA (FLOPPY)	
DKWD	DISK WRITE DATA (FLOPPY)	
DKWE	DISK WRITE ENABLE (FLOPPY)	
DMAL	CHIP DMA REQUEST LINE (CHIPS)	
DRA[8:0]	DRAM ADDRESS BUS (DRAM)	
DRD[15:0]	DRAM DATA BUS (DRAM)	
DSR	DATA SET READY (RS232 PORT)	
DTACK	DATA TRANSFER ACKNOWLEDGE (68000)	
DTR	DATA TERMINAL READY (RS232 PORT)	
E	PERIPHERAL ENABLE CLOCK (68000)	
EXTICK	EXPANSION PRESENT / RTC TICK	
FC[2:0]	FUNCTION CODE (68000)	
FIRE0/1	FIRE BUTTON 0/1 (JOYSTICKS)	
HLT	PROCESSOR HALT (68000)	
HSYNC	HORIZONTAL SYNC (VIDEO)	
INDEX	INDEX PULSE (FLOPPY)	
INT[2,3,6]	INTERRUPT REQUEST (CHIPS)	
IORESET	I/O RESET	
IPL[2:0]	INTERRUPT PRIORITY LEVEL (68000)	
KBCLOCK	KEYBOARD CLOCK (KEYBOARD)	
KBDATA	KEYBOARD DATA (KEYBOARD)	
KBRESET	KEYBOARD RESET (KEYBOARD)	
LDS/UDS	UPPER / LOWER DATA STROBES (68000)	
LED	POWER ON LED / AUDIO FILTER DISABLE	
LEFT/RIGHT	LEFT RIGHT AUDIO (AUDIO)	

SIGNAL	DESCRIPTION (AREA)	PAGES
LPEN	LIGHT PEN TRIGGER (JOYSTICKS)	
MTR	MOTOR ON (FLOPPY)	
MTRQ	MOTOR ON - DRIVE Q (FLOPPY)	
MOV/MOH	MOUSE 0 QUADRATURE V/H (JOYSTICKS)	
M1V/M1H	MOUSE 1 QUADRATURE V/H (JOYSTICKS)	
OVL	OVERLAY ROM OVER RAM	
OVR	OVERRIDE SYSTEM DECODING	
PIXELSW	GENLOCK PIXEL SWITCH (VIDEO)	
POTOX/OY	POT LINES 0 X/Y (JOYSTICKS)	
POT1X/1Y	POT LINES 1 X/Y (JOYSTICKS)	
POUT	PAPER OUT (PARALLEL PORT)	
PPD[7:0]	PARALLEL PORT DATA (PARALLEL PORT)	
RAMEN	RAM ENABLE (CHIPS)	
REGEN	CHIP REGISTER ENABLE (CHIPS)	
RAS0/1	ROW ADDRESS STROBE (DRAM)	
RDY	DRIVE READY (FLOPPY)	
RESET	GENERAL RESET	
RGA[8:1]	REGISTER ADDRESS BUS (CHIPS)	
R/G/B	RED / GREEN / BLUE (VIDEO)	
RI	RING INDICATE (RS232 PORT)	
ROMEN	ROM ENABLE (ROM)	
RTS	REQUEST TO SEND (RS232 PORT)	
RST	PROCESSOR RESET (68000)	
RXD	RECEIVE DATA (RS232 PORT)	
RW	PROCESSOR READ/WRITE (68000)	
SEL	SELECT (PARALLEL PORT)	
SEL[3:0]	DRIVE SELECT (FLOPPY)	
SIDE	SIDE SELECT (FLOPPY)	
STEP	STEP IN/OUT COMMAND (FLOPPY)	
TRK0	TRACK ZERO SENSE (FLOPPY)	
TXD	TRANSMIT DATA (RS232 PORT)	
VMA	VALID MEMORY ADDRESS (68000)	
VPA	VALID PERIPHERAL ADDRESS (68000)	
VSYNC	VERTICAL SYNC (VIDEO)	
WE	WRITE ENABLE (DRAM)	
WPRCT	WRITE PROTECT SENSE (FLOPPY)	
XCLK	EXTERNAL GENLOCK CLOCK (VIDEO)	
XCLKEN	EXTERNAL CLOCK ENABLE (VIDEO)	
XRDY	EXTERNAL DATA READY	
	** CREDIT CARD AND IDE STUFF? **	

KEY COMPONENTS

REF	CHIP	DESCRIPTION	PAGE
U1	68000	68000 PROCESSOR, 8MHZ	2
U2	8375	ECS AGNUS A300/A500+	2
U3	8364	PAULA	5
U4	8373	ECS DENISE	4
U5	4145-20	GAYLE GATE ARRAY	2,8,11
U6	ASST	ROM 256KX16, 200 NS	10
U7-8	8520	AMIGA VIA, 1 MHZ	7
U10-11	28F10	FLASH MEMORY 128KX8	10
U12	CXA1145	SONY VIDEO ENCODER	4
U13	6570-36	AMGIA KEYBOARD MPU	9
U14	NE555	RESET TIMER	9
U16-17	ASST	DRAM 256KX16, 120 NS	3
U15	LF347	BIMOS OP-AMP	5
	TL084	BIMOS OP-AMP	ALT
U28	1488	EIA LINE DRIVER	7
U29	1489	EIA LINE RECEIVER	7
X1	OSC	TTL 28.63636 MHZ NTSC	2
	OSC	TTL 28.37512 MHZ PAL	ALT
Y451	XTAL	4.43619MHZ PAL BURST	4
Y621	XTAL	3MHZ CERAMIC RESONATOR	9
X2	ASST	PAL VIDEO MODULATOR	4
	ASST	NTSC VIDEO MODULATOR	4

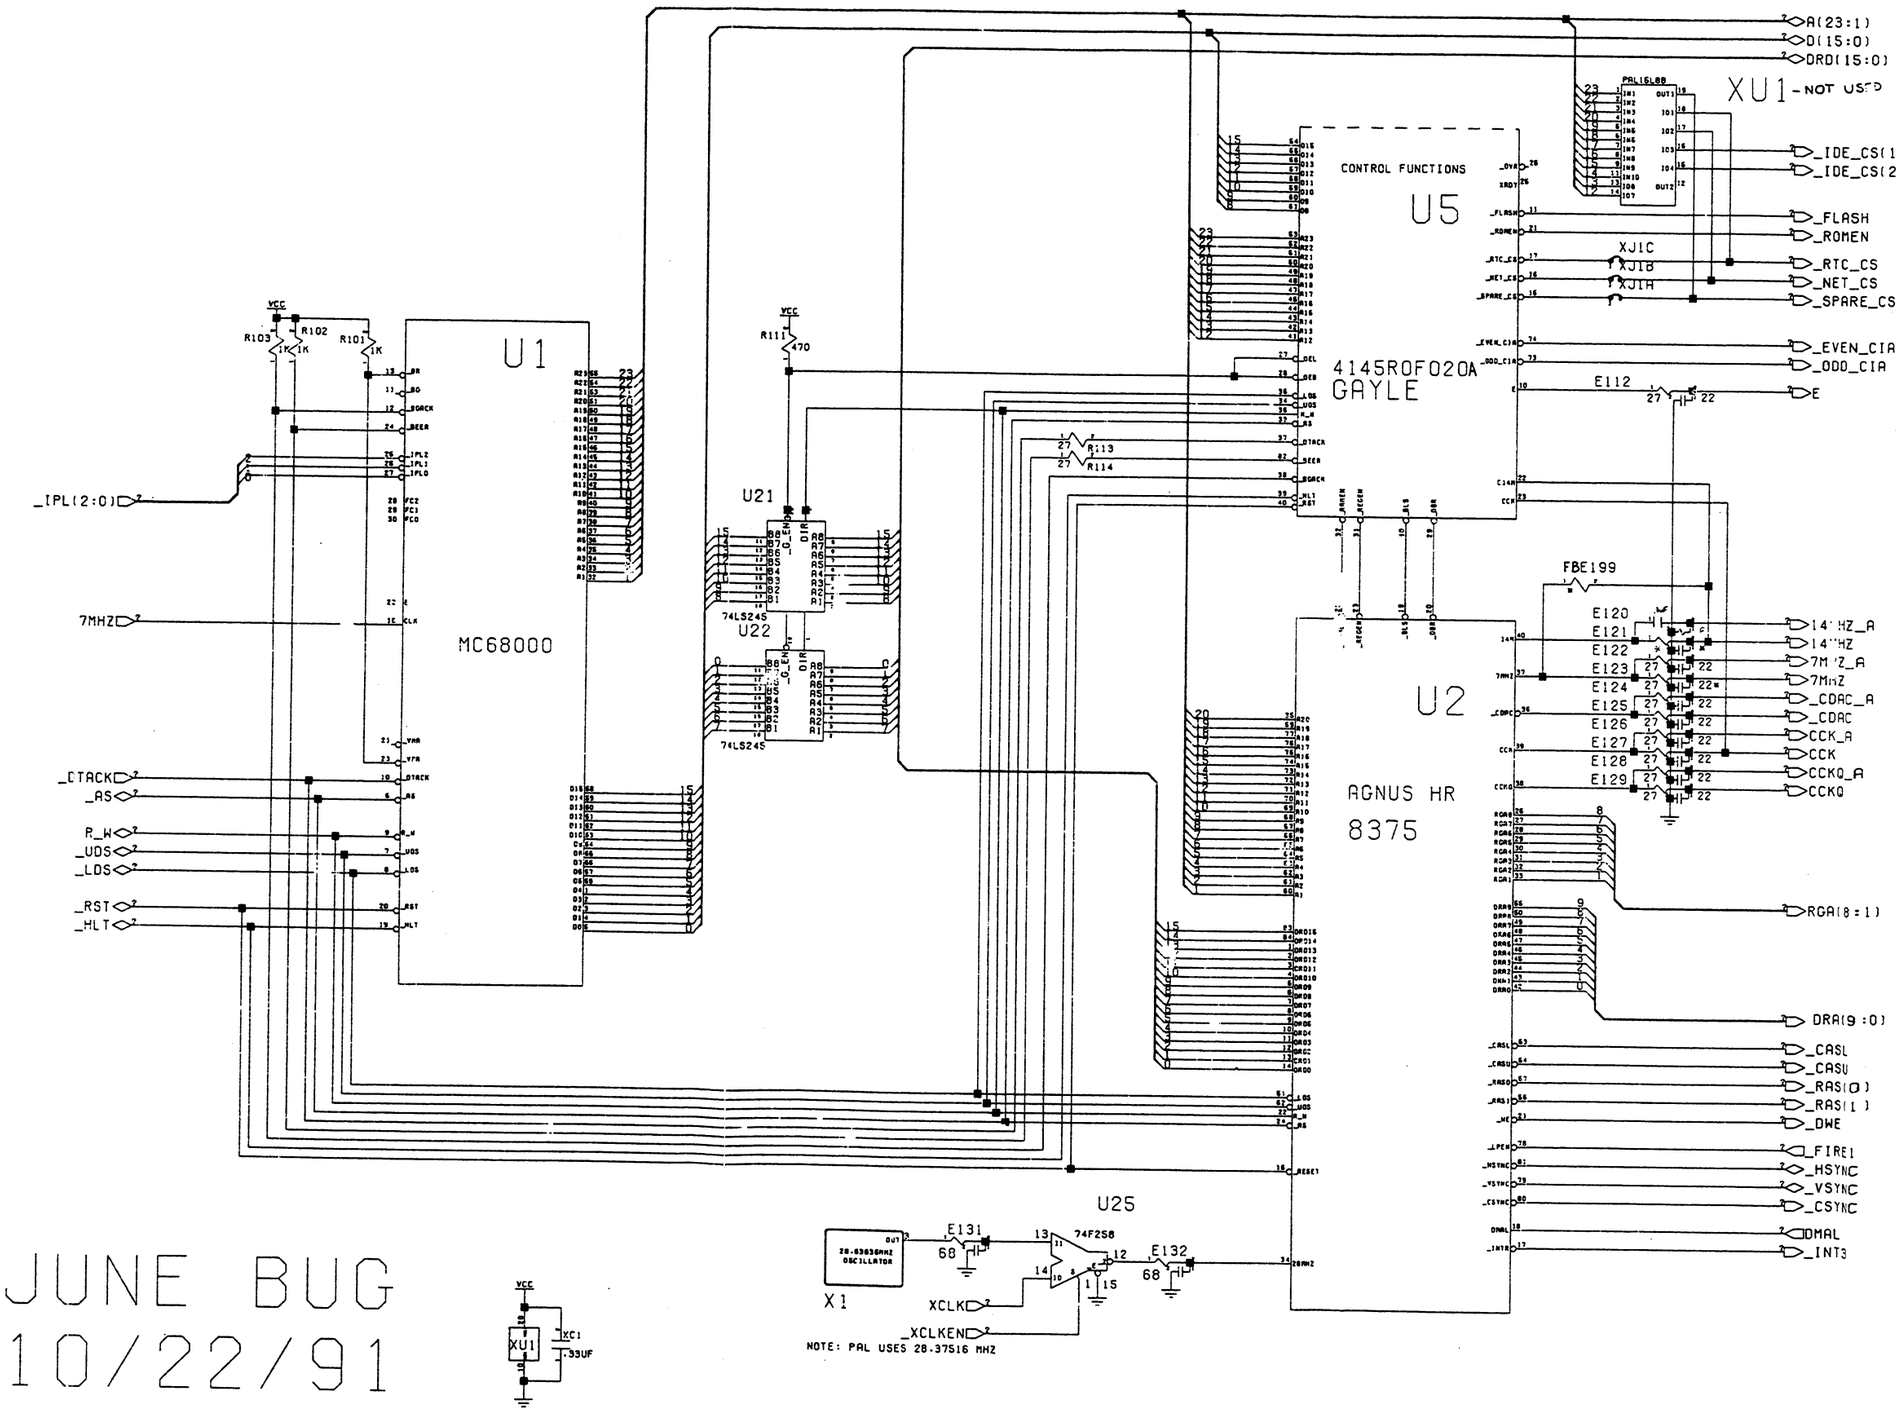
A(23:1)
D(15:0)
DRD(15:0)
XU1 - NOT USED
U1
MC68000
U21
74LS245
U22
74LS245
R111
470
R103
1K
R102
1K
R101
1K
VCC
_IPL(2:0)
7MHZ
_DTACK
_AS
R_W
_UDS
_LDS
_RST
_HLT
CONTROL FUNCTIONS
U5
4145ROF020A
GAYLE
_IDE_CS(1
_IDE_CS(2
_FLASH
_ROMEN
_RTC_CS
_NET_CS
_SPARE_CS
_EVEN_CIA
_ODD_CIA
E
E112
R113
R114
FBE199
E120
E121
E122
E123
E124
E125
E126
E127
E128
E129
U2
AGNUS HR
8375
14MHZ_A
14MHZ
7M?Z_A
7MHZ
_CDAC_A
_CDAC
CCK_A
CCK
CCKQ_A
CCKQ
RGA(8:1)
DRA(9:0)
_CASL
_CASU
_RAS(0)
_RAS(1)
_DWE
_FIRE1
_HSYNC
_VSYNC
_CSYNC
_DMAL
_INT3
U25
28.63636MHZ
OSCILLATOR
X1
E131
68
74F258
E132
68
XCLK
_XCLKEN
NOTE: PAL USES 28.37516 MHZ
XU1
XC1
.33UF
JUNE BUG
10/22/91

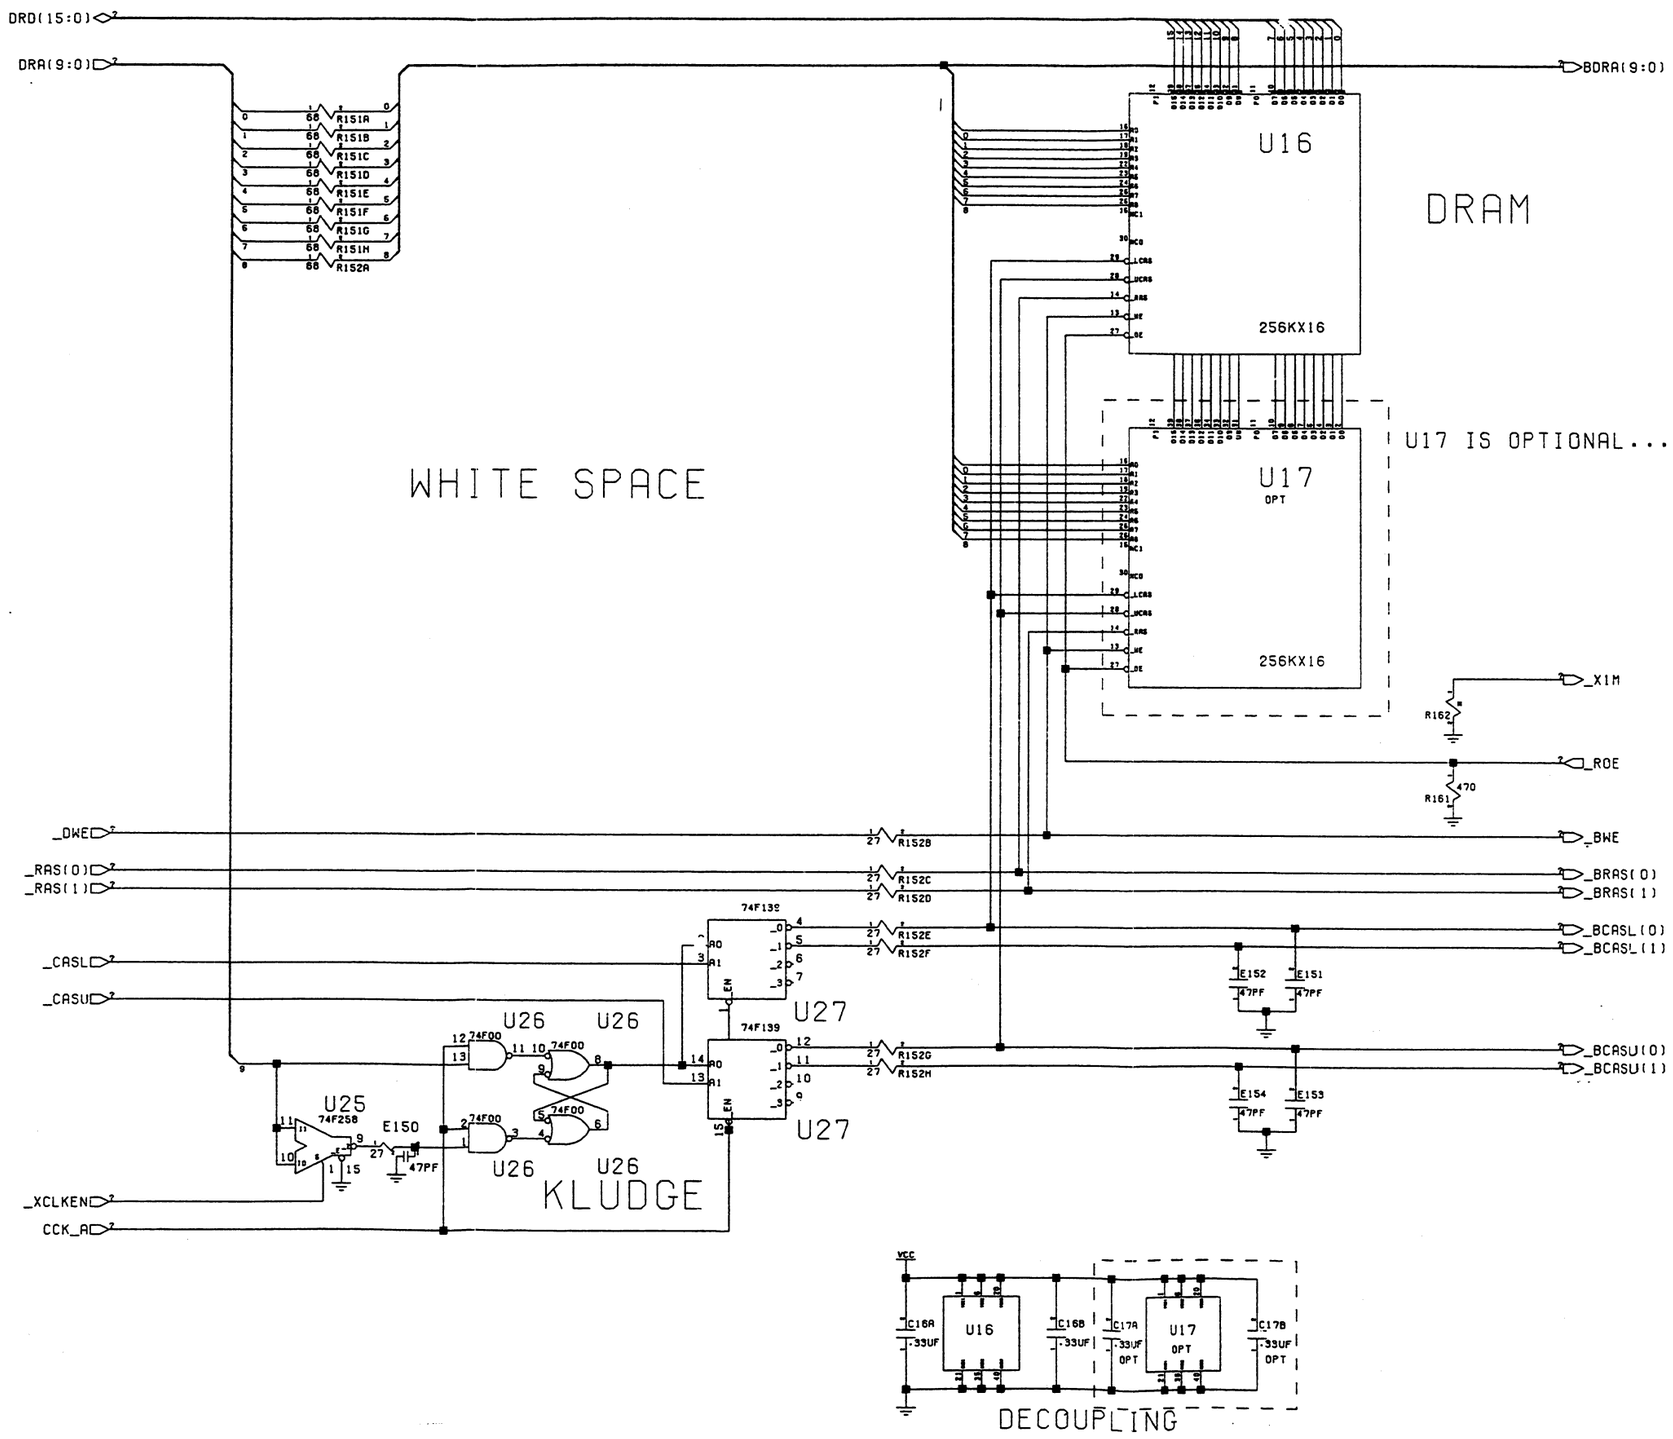
DRD(15:0)
DRA(9:0)
BDRA(9:0)
R151A
R151B
R151C
R151D
R151E
R151F
R151G
R151H
R152A
U16
DRAM
256KX16
WHITE SPACE
U17 IS OPTIONAL...
U17
OPT
256KX16
_XIM
R162
_ROE
R161
470
_DWE
R152B
_BWE
_RAS(0)
_RAS(1)
R152C
R152D
_BRAS(0)
_BRAS(1)
74F139
_CASL
_CASU
R152E
R152F
_BCASL(0)
_BCASL(1)
E152
E151
47PF
U27
74F139
R152G
R152H
_BCASU(0)
_BCASU(1)
E154
E153
47PF
U26
U26
74F00
74F00
74F00
U25
74F258
E150
47PF
U26
U26
KLUDGE
_XCLKEN
CCK_A
VCC
C16A
.33UF
U16
C16B
.33UF
C17A
.33UF
OPT
U17
OPT
C17B
.33UF
OPT
DECOUPLING

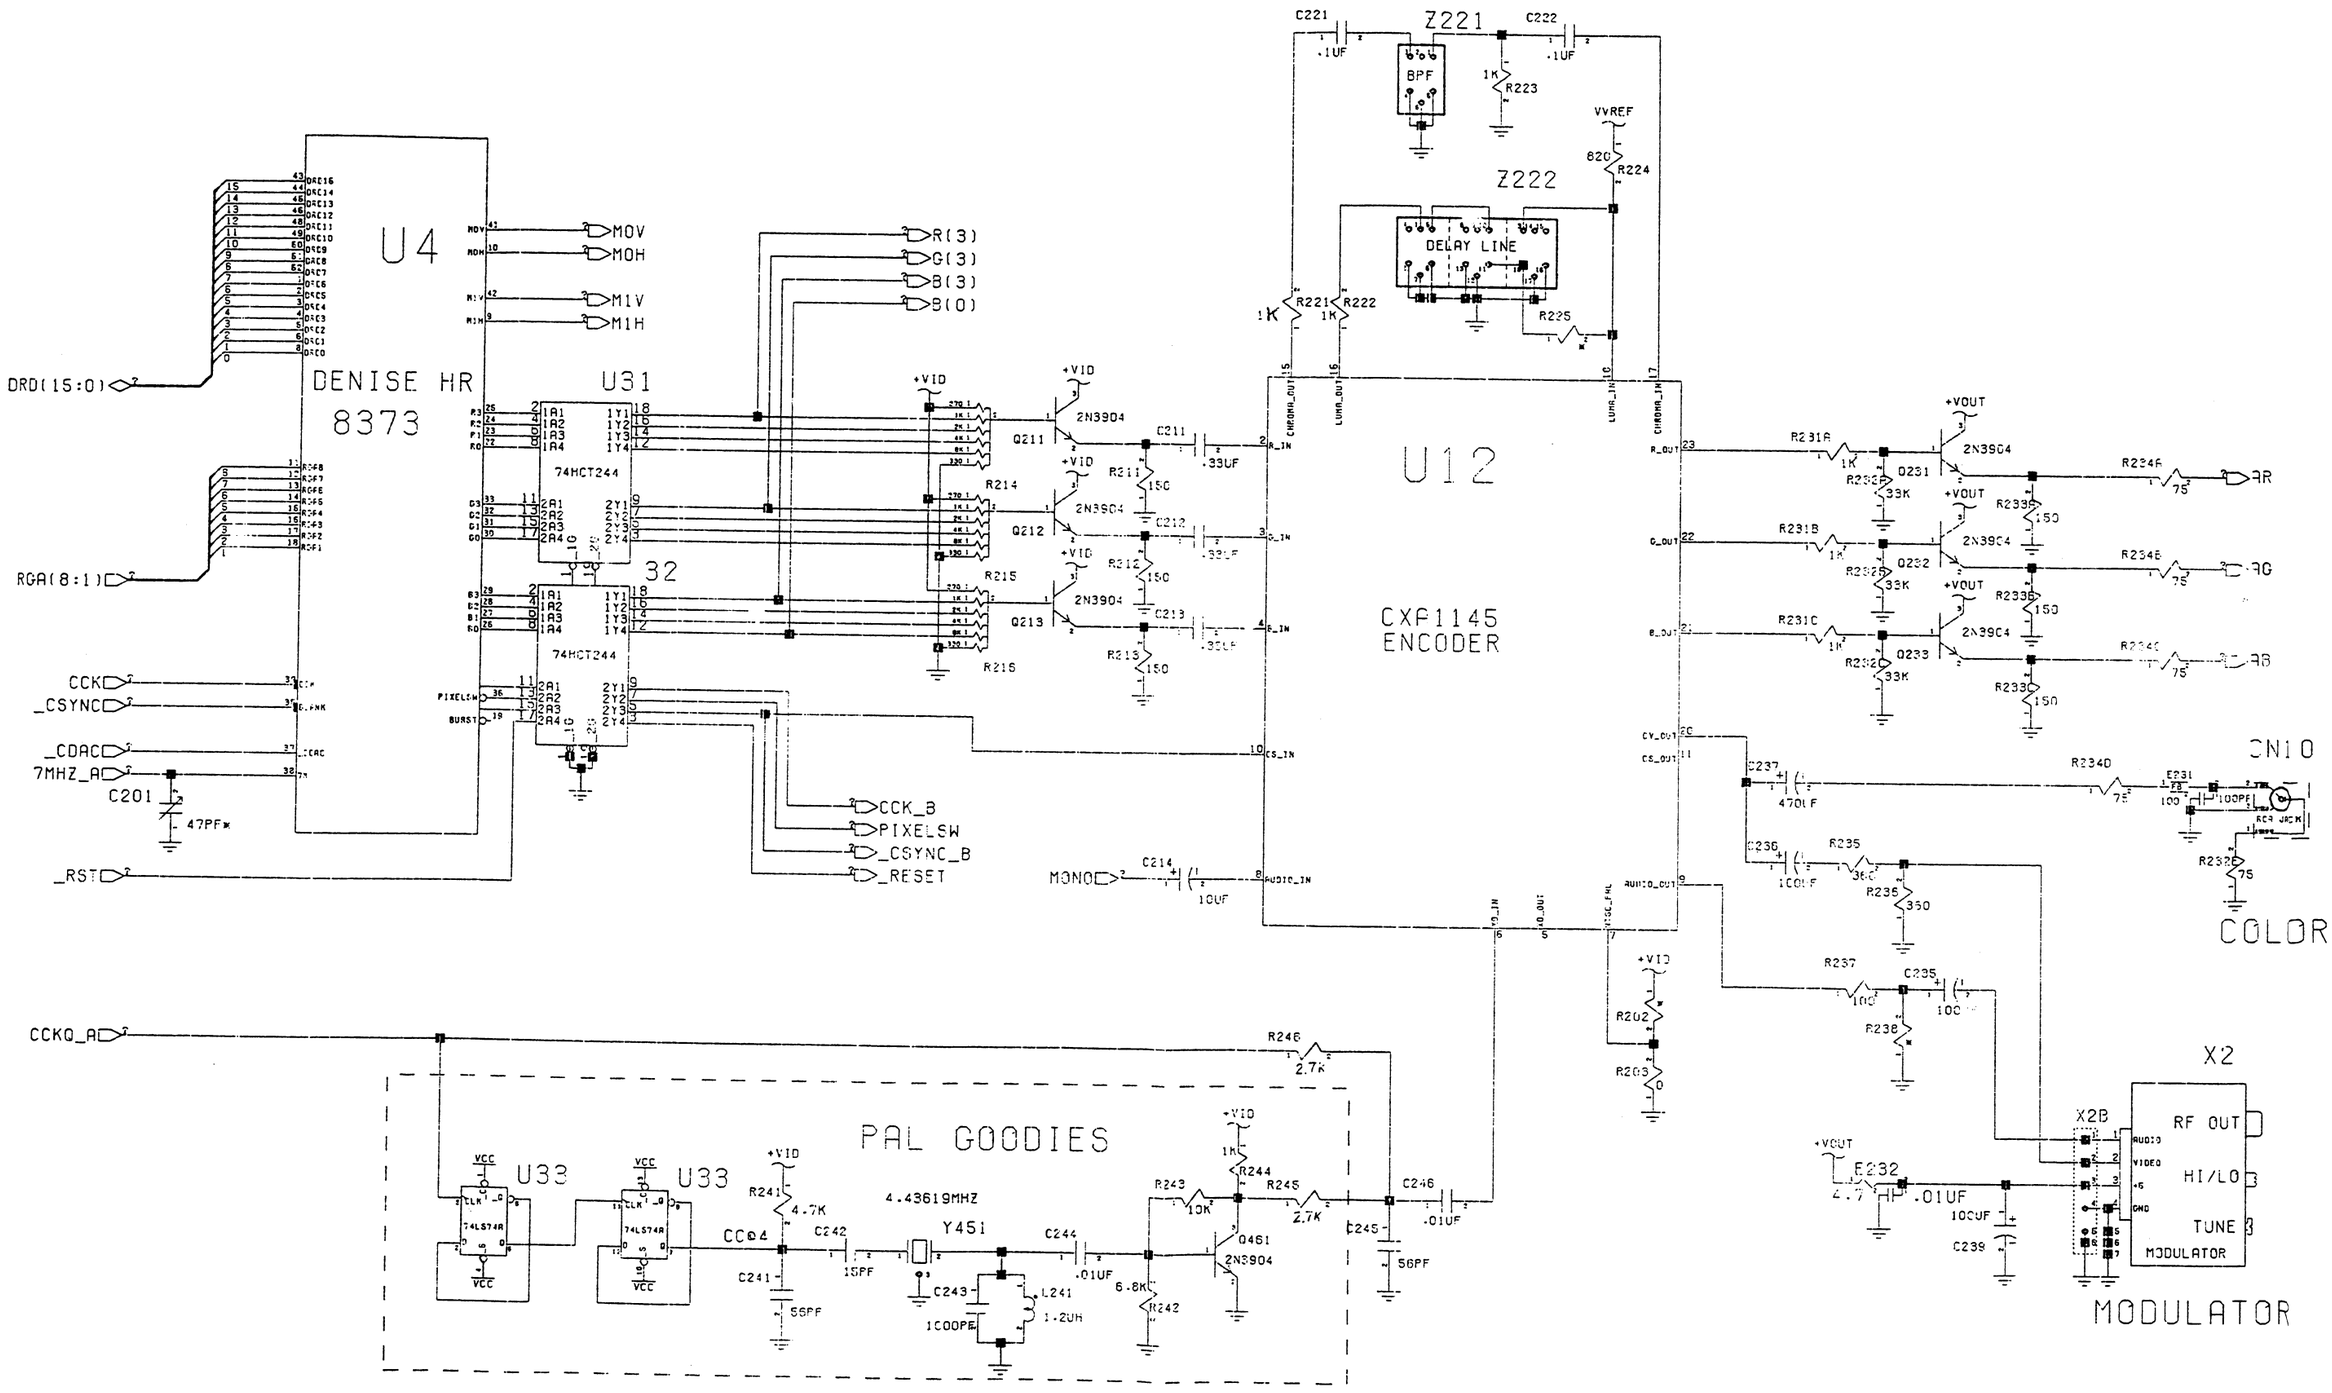
U4
DENISE HR
8373
U31
74HCT244
32
DRD(15:0)
RGA(8:1)
CCK
_CSYNC
_CDAC
7MHZ_A
C201
47PF
_RST
MOV
MOH
M1V
M1H
R(3)
G(3)
B(3)
B(0)
CCK_B
PIXELSW
_CSYNC_B
_RESET
+VID
2N3904
Q211
Q212
Q213
R214
R215
R216
R211
R212
R213
150
C211
.33UF
C212
C213
U12
CXP1145
ENCODER
Z221
BPF
C221
.1UF
C222
R223
1K
VVREF
820
R224
Z222
DELAY LINE
R221
R222
R225
CHROMA_OUT
LUMA_OUT
LUMA_IN
CHROMA_IN
R_IN
G_IN
B_IN
CS_IN
AUDIO_IN
MONO
C214
10UF
CV_OUT
CS_OUT
AUDIO_OUT
R_OUT
G_OUT
B_OUT
R231A
R231B
R231C
Q231
Q232
Q233
R232A
R232B
R232C
33K
R233A
R233B
R233C
R234A
R234B
R234C
75
+VOUT
CN10
C237
470UF
R234D
E231
100PF
RCA JACK
R232D
C236
100UF
R235
360
350
C235
R237
100
R238
R202
R203
0
X2
X2B
RF OUT
HI/LO
TUNE
MODULATOR
AUDIO
VIDEO
+5
GND
E232
4.7
.01UF
C239
COLOR
MODULATOR
CCKQ_A
R246
2.7K
PAL GOODIES
U33
74LS74A
VCC
CCQ4
R241
4.7K
C241
56PF
C242
15PF
4.43619MHZ
Y451
C243
100OPF
L241
1.2UH
C244
.01UF
6.8K
R242
Q461
2N3904
R243
10K
R244
1K
R245
2.7K
C246
.01UF
C245
56PF

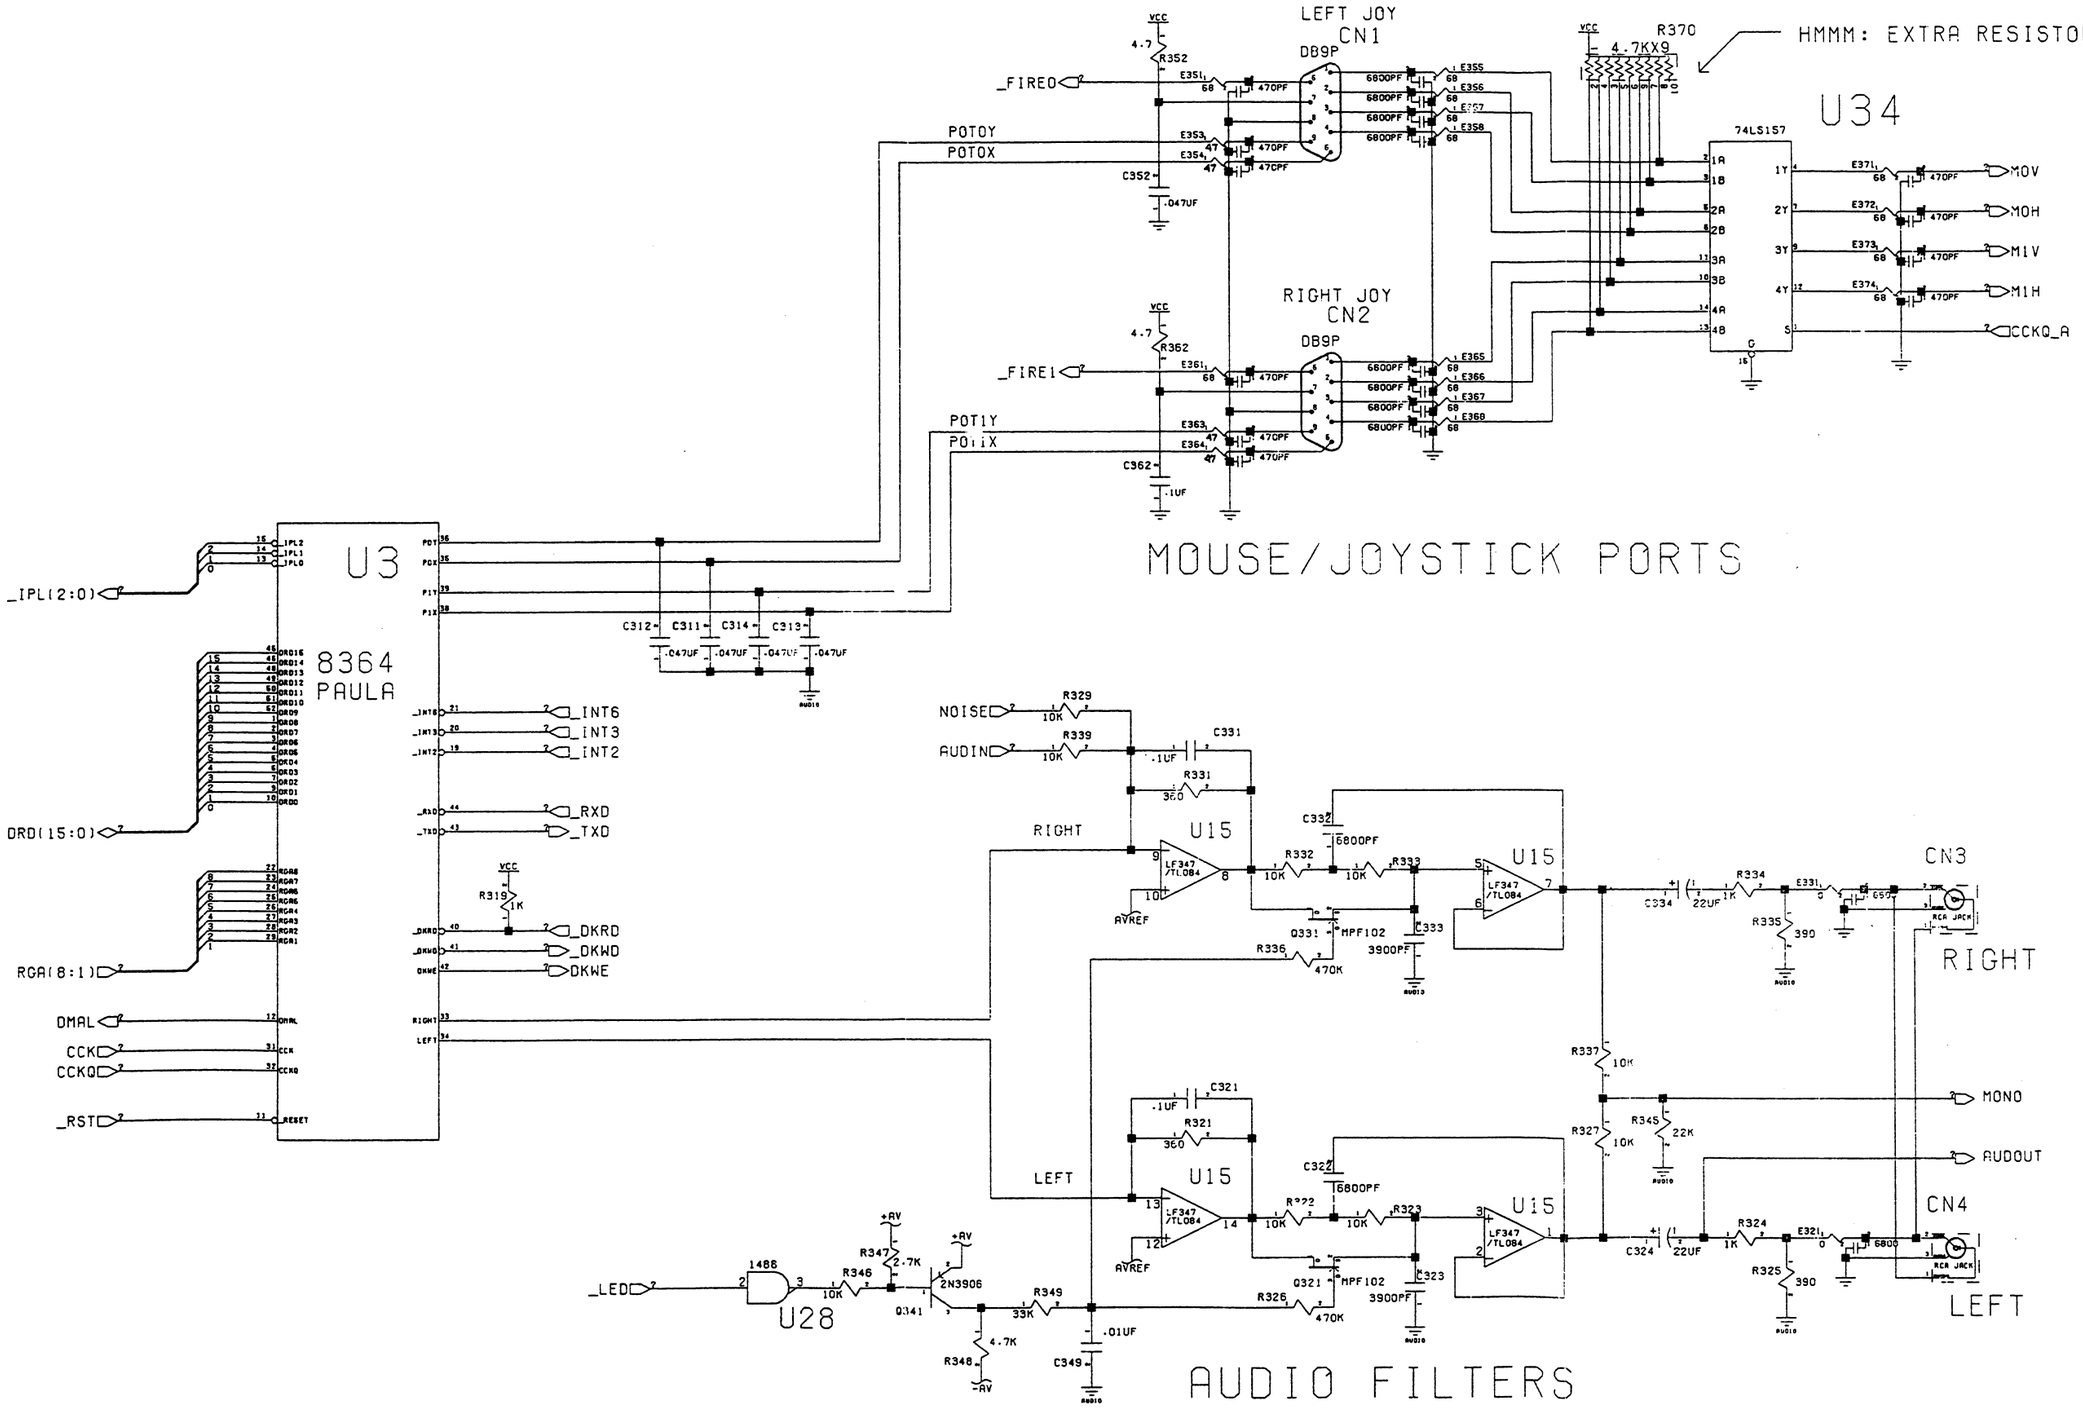

NOTE: LED OFF, FILTERS BYPASSED

GENERAL DECOUPLING

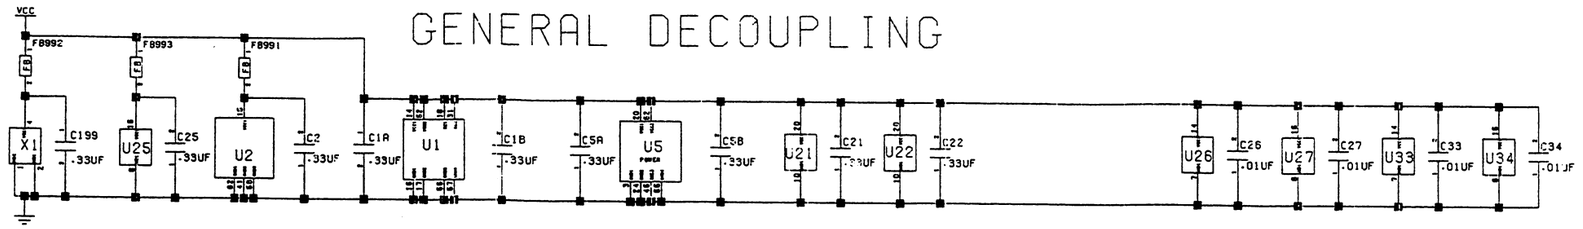

VIDEO CUT

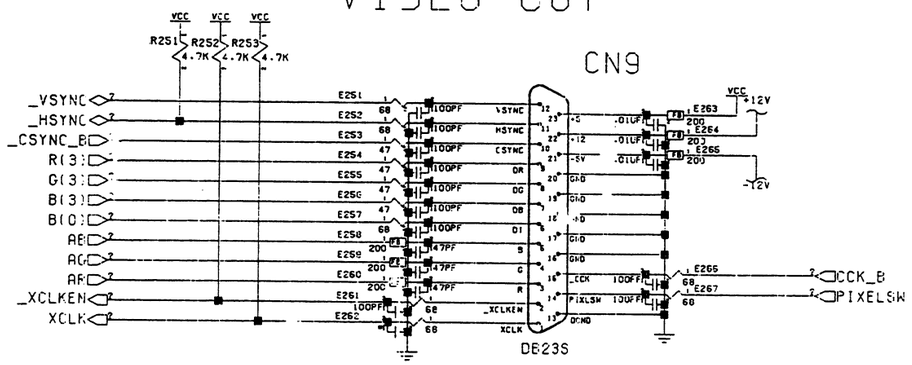

AUDIO POWER

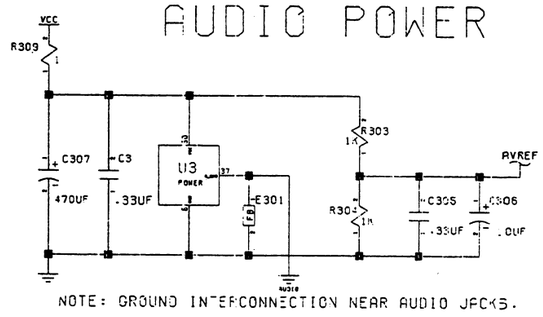

NOTE: GROUND INTERCONNECTION NEAR AUDIO JACKS.

VIDEO POWER

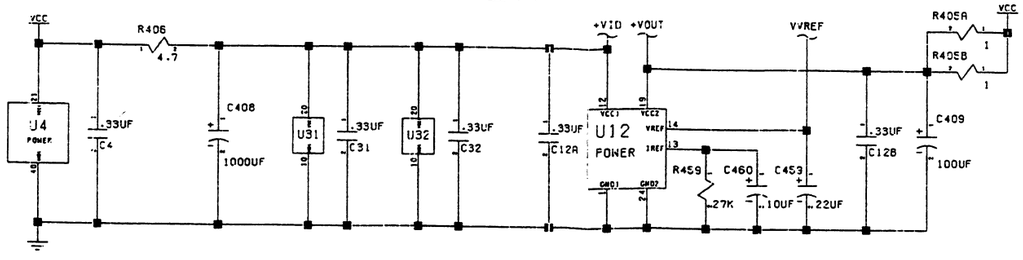

DECOUPLING

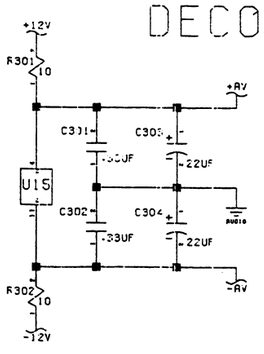

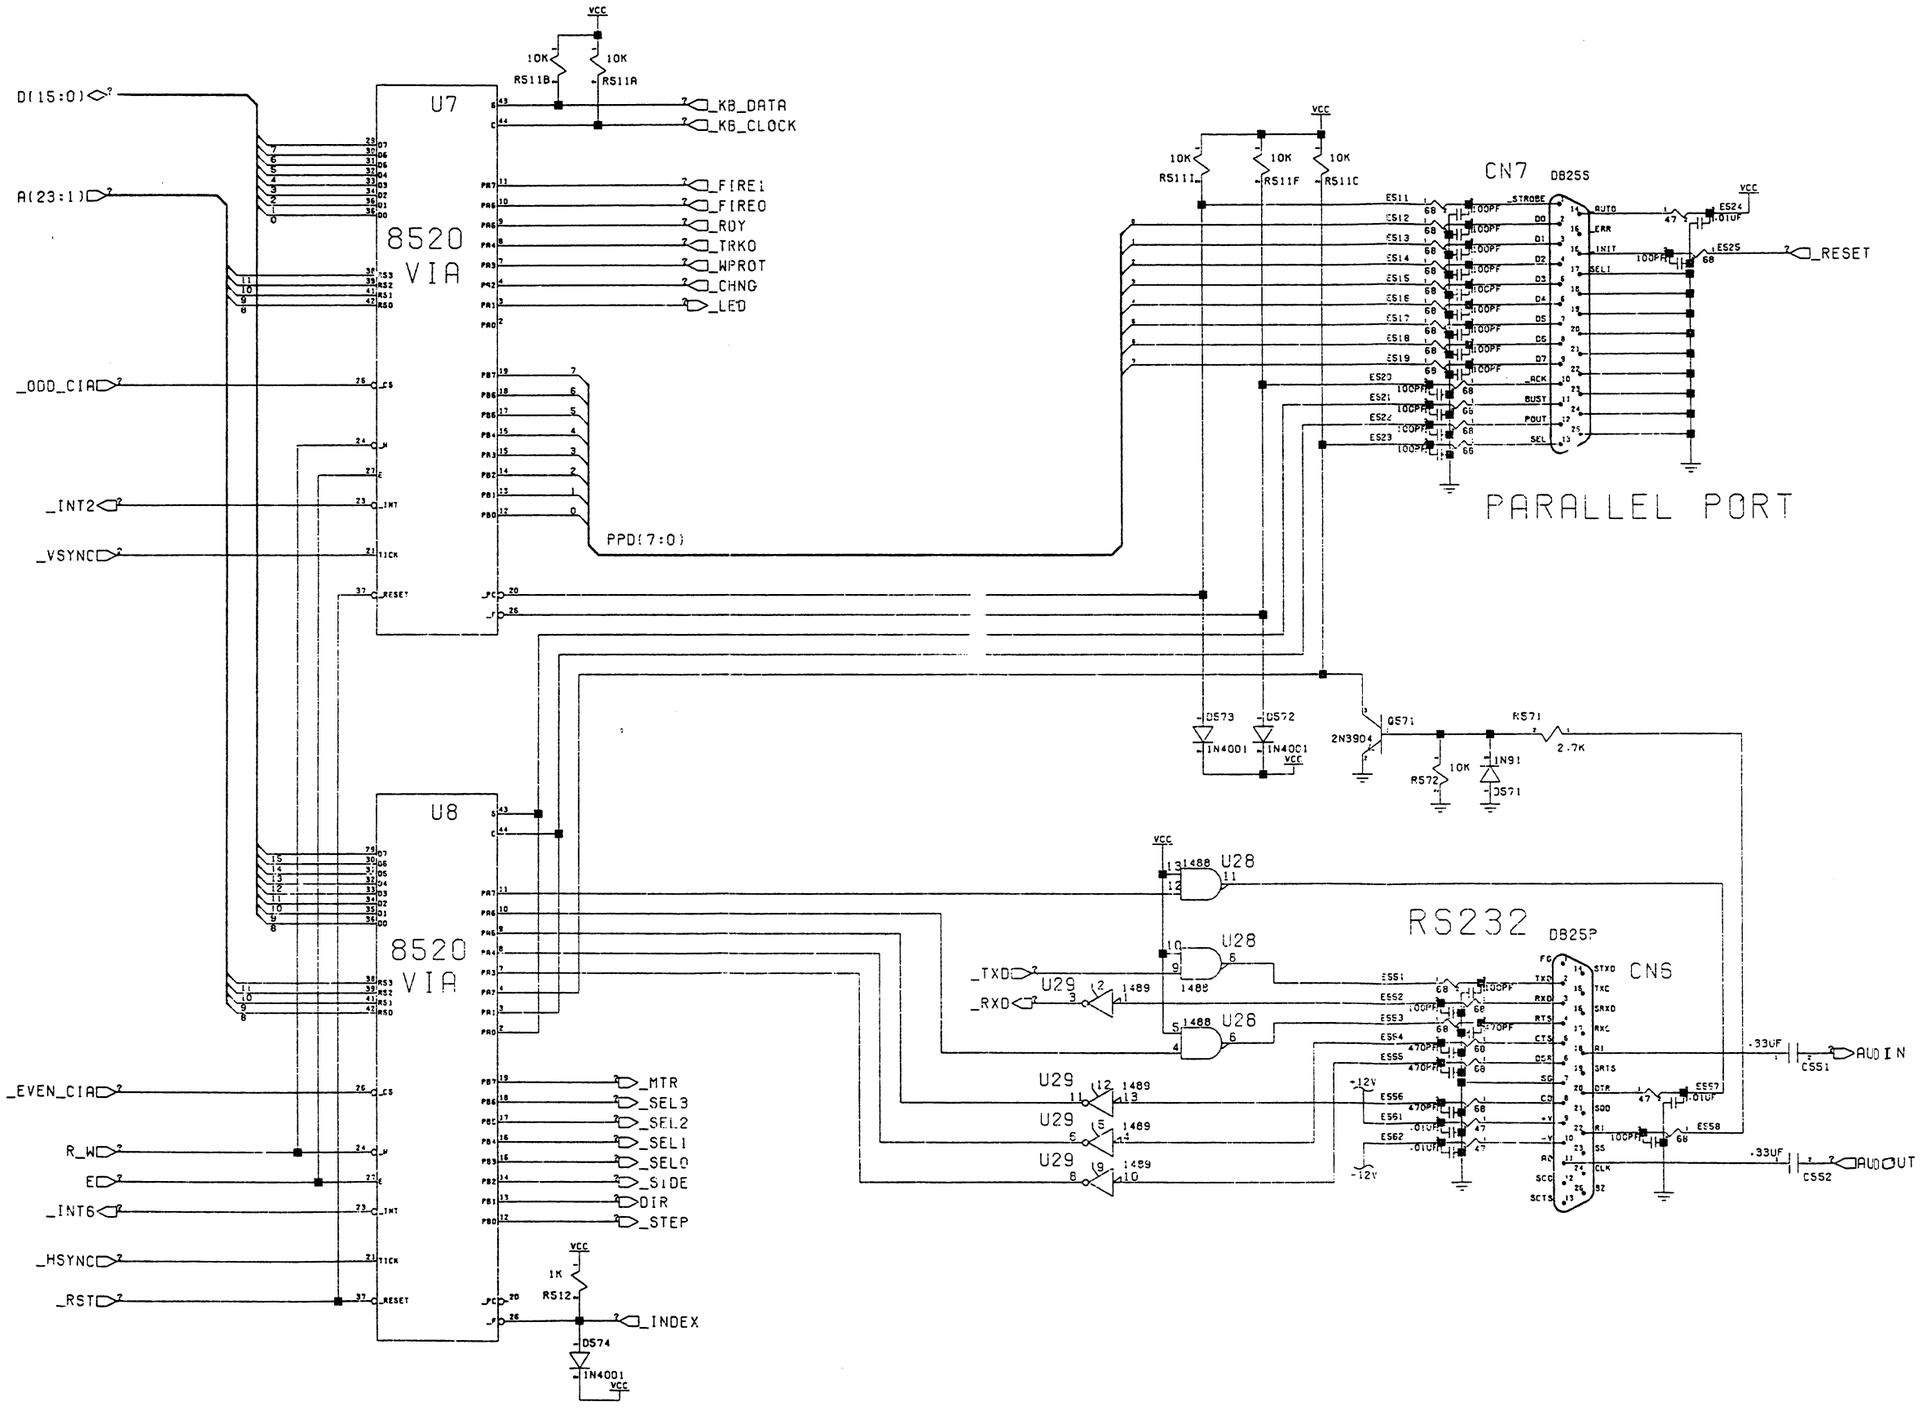
U7
8520
VIA
U8
8520
VIA
D(15:0)
A(23:1)
_ODD_CIA
_INT2
_VSYNC
_EVEN_CIA
R_W
E
_INT6
_HSYNC
_RST
_RESET
_KB_DATA
_KB_CLOCK
_FIRE1
_FIRE0
_RDY
_TRK0
_WPROT
_CHNG
_LED
PPD(7:0)
_MTR
_SEL3
_SEL2
_SEL1
_SEL0
_SIDE
DIR
_STEP
_INDEX
RS11B
RS11A
RS11
RS11F
RS11C
RS12
VCC
1K
D574
IN4001
D573
D572
Q571
2N3904
RS71
2.7K
RS72
10K
D571
CN7
DB25S
PARALLEL PORT
_STROBE
_ACK
BUSY
POUT
SEL
AUTO
_ERR
INIT
SELI
_RESET
U28
U29
1488
1489
_TXD
_RXD
RS232
DB25P
CN8
STXD
TXC
SRXD
RXC
SRTS
DTR
SQD
SS
CLK
SCD
SCTS
-12V
.33UF
CSS1
CSS2
AUD IN
AUD OUT

FLOPPY LOGIC

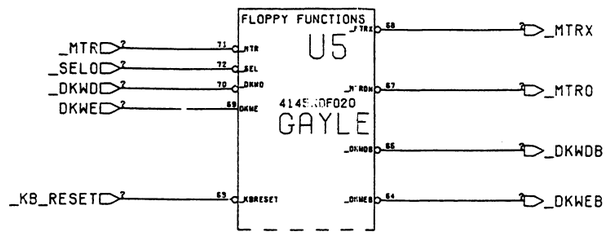

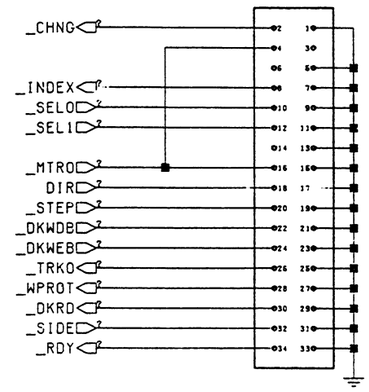

INTERNAL FLOPPY CN11

FLOPPY POWER

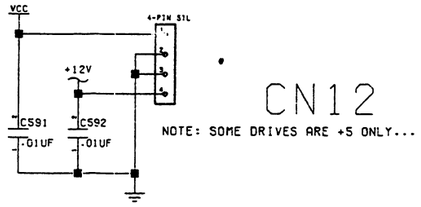

CN12

NOTE: SOME DRIVES ARE +5 ONLY...

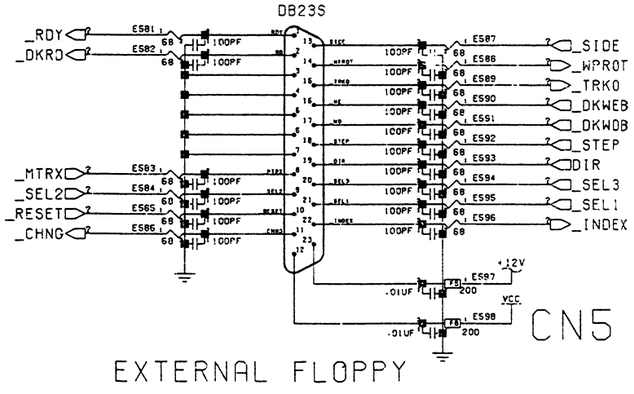

CN5

EXTERNAL FLOPPY

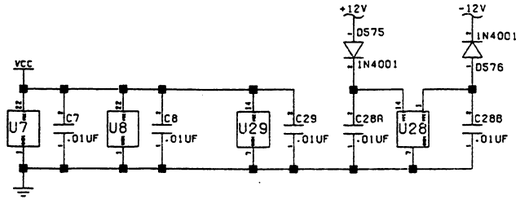

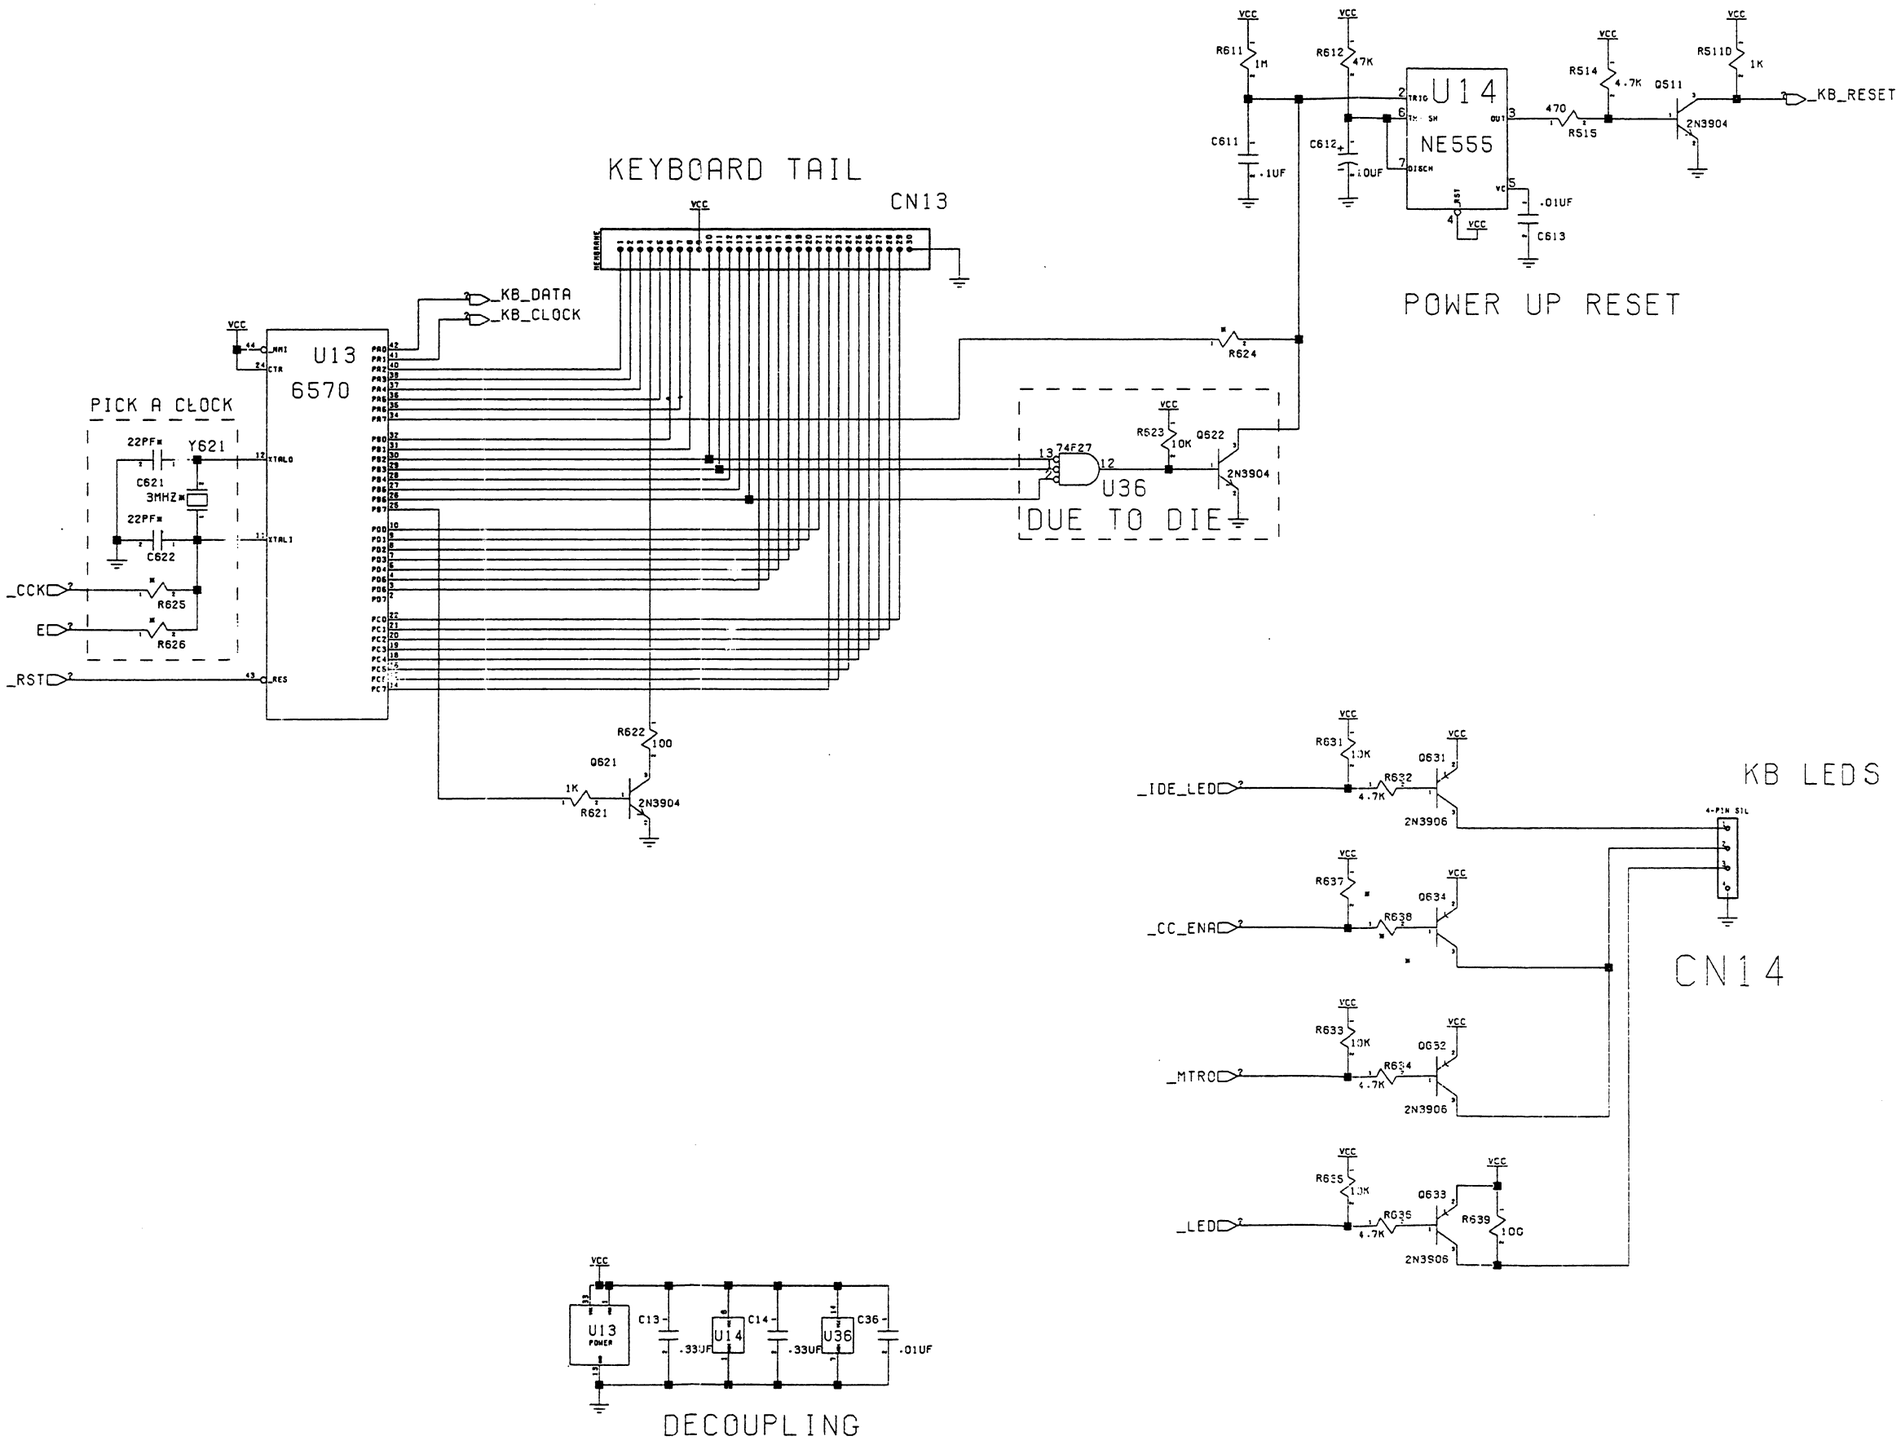
KEYBOARD TAIL
CN13
KB_DATA
KB_CLOCK
U13
6570
PICK A CLOCK
22PF
Y621
C621
3MHZ
22PF
C622
_CCK
E
_RST
R625
R626
R622
100
Q621
1K
R621
2N3904
R624
R623
10K
Q522
2N3904
74F27
U36
DUE TO DIE
VCC
R611
1M
C611
.1UF
R612
47K
C612
.10UF
U14
NE555
.01UF
C613
470
R515
R514
4.7K
Q511
2N3904
R511D
1K
KB_RESET
POWER UP RESET
R631
1.0K
Q631
R632
4.7K
2N3906
_IDE_LED
R637
Q634
R638
_CC_ENA
R633
Q632
R634
_MTRC
R635
Q633
R636
R639
100
_LED
4-PIN SIL
CN14
KB LEDS
U13
POWER
C13
.33UF
C14
.33UF
C36
.01UF
DECOUPLING

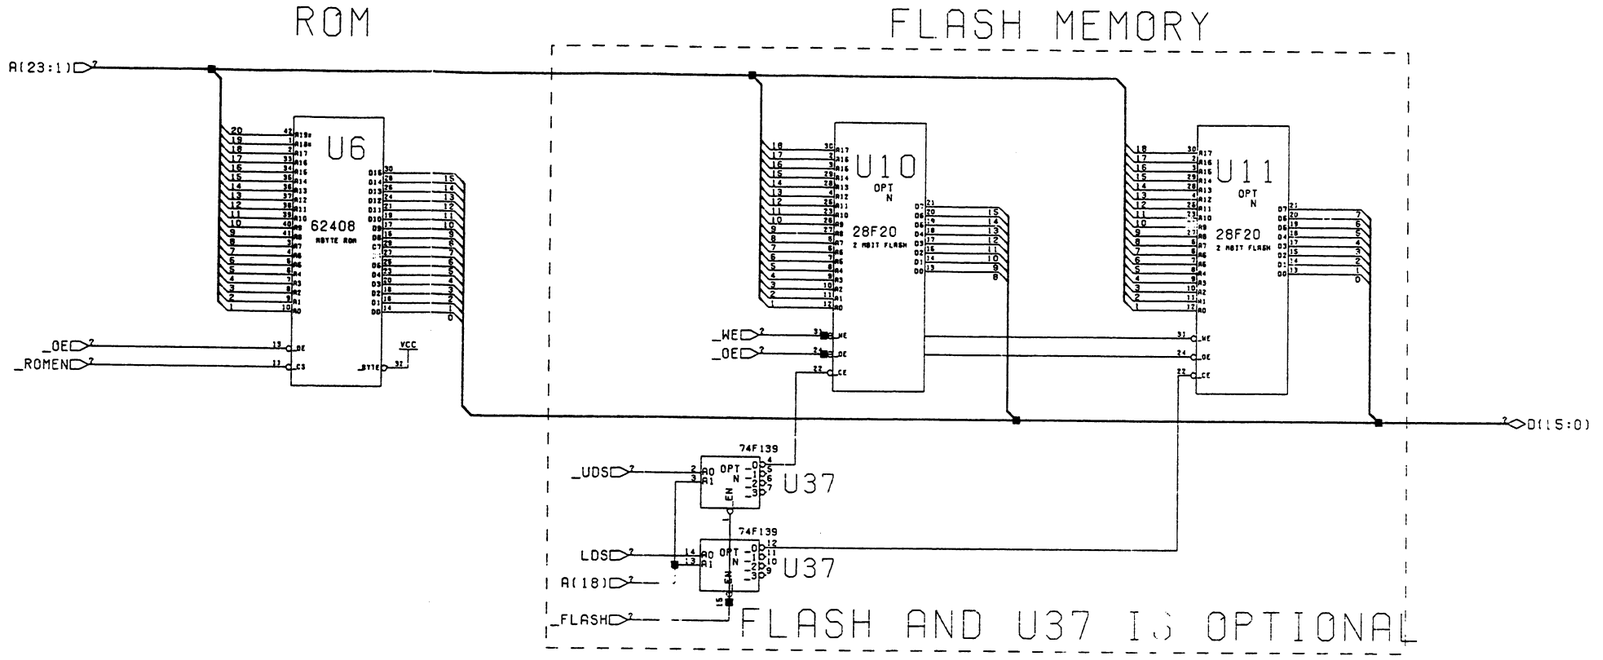
ROM
FLASH MEMORY
A[23:1]
U6
62408
8BYTE ROM
U10
OPT
N
28F20
2 MBIT FLASH
U11
OPT
N
28F20
2 MBIT FLASH
_OE
_ROMEN
_WE
_OE
D[15:0]
74F139
_UDS
U37
74F139
LDS
U37
A[18]
_FLASH
FLASH AND U37 IS OPTIONAL

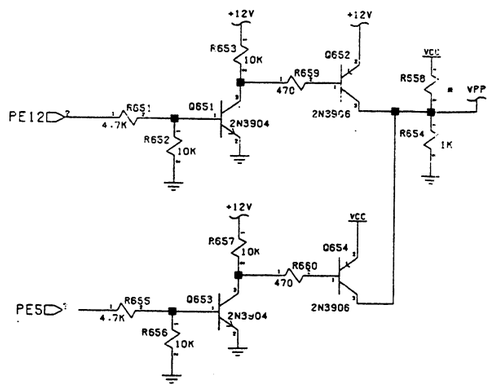
PROGRAMMING VOLTAGE
+12V
R653
10K
Q652
R659
470
2N3906
VCC
R558
VPP
PE12
R651
4.7K
Q651
2N3904
R652
10K
R654
1K
R657
10K
Q654
R660
470
2N3906
PE5
R655
4.7K
Q653
2N3904
R656
10K

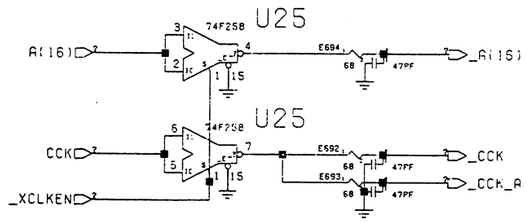
U25
74F258
A[16]
E694
68
47PF
_A[16]
U25
74F258
CCK
E692
E693
_CCK
_CCK_A
_XCLKEN
FUNNY INVERTERS

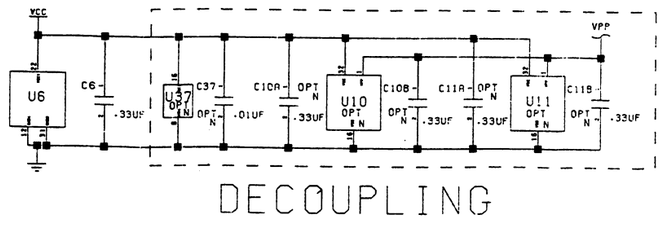
VCC
VPP
U6
C6
.33UF
U37
OPT
N
C37
OPT
N
.01UF
C10A
OPT
N
.33UF
U10
OPT
N
C10B
OPT
N
.33UF
C11A
OPT
N
.33UF
U11
OPT
N
C11B
OPT
N
.33UF
DECOUPLING

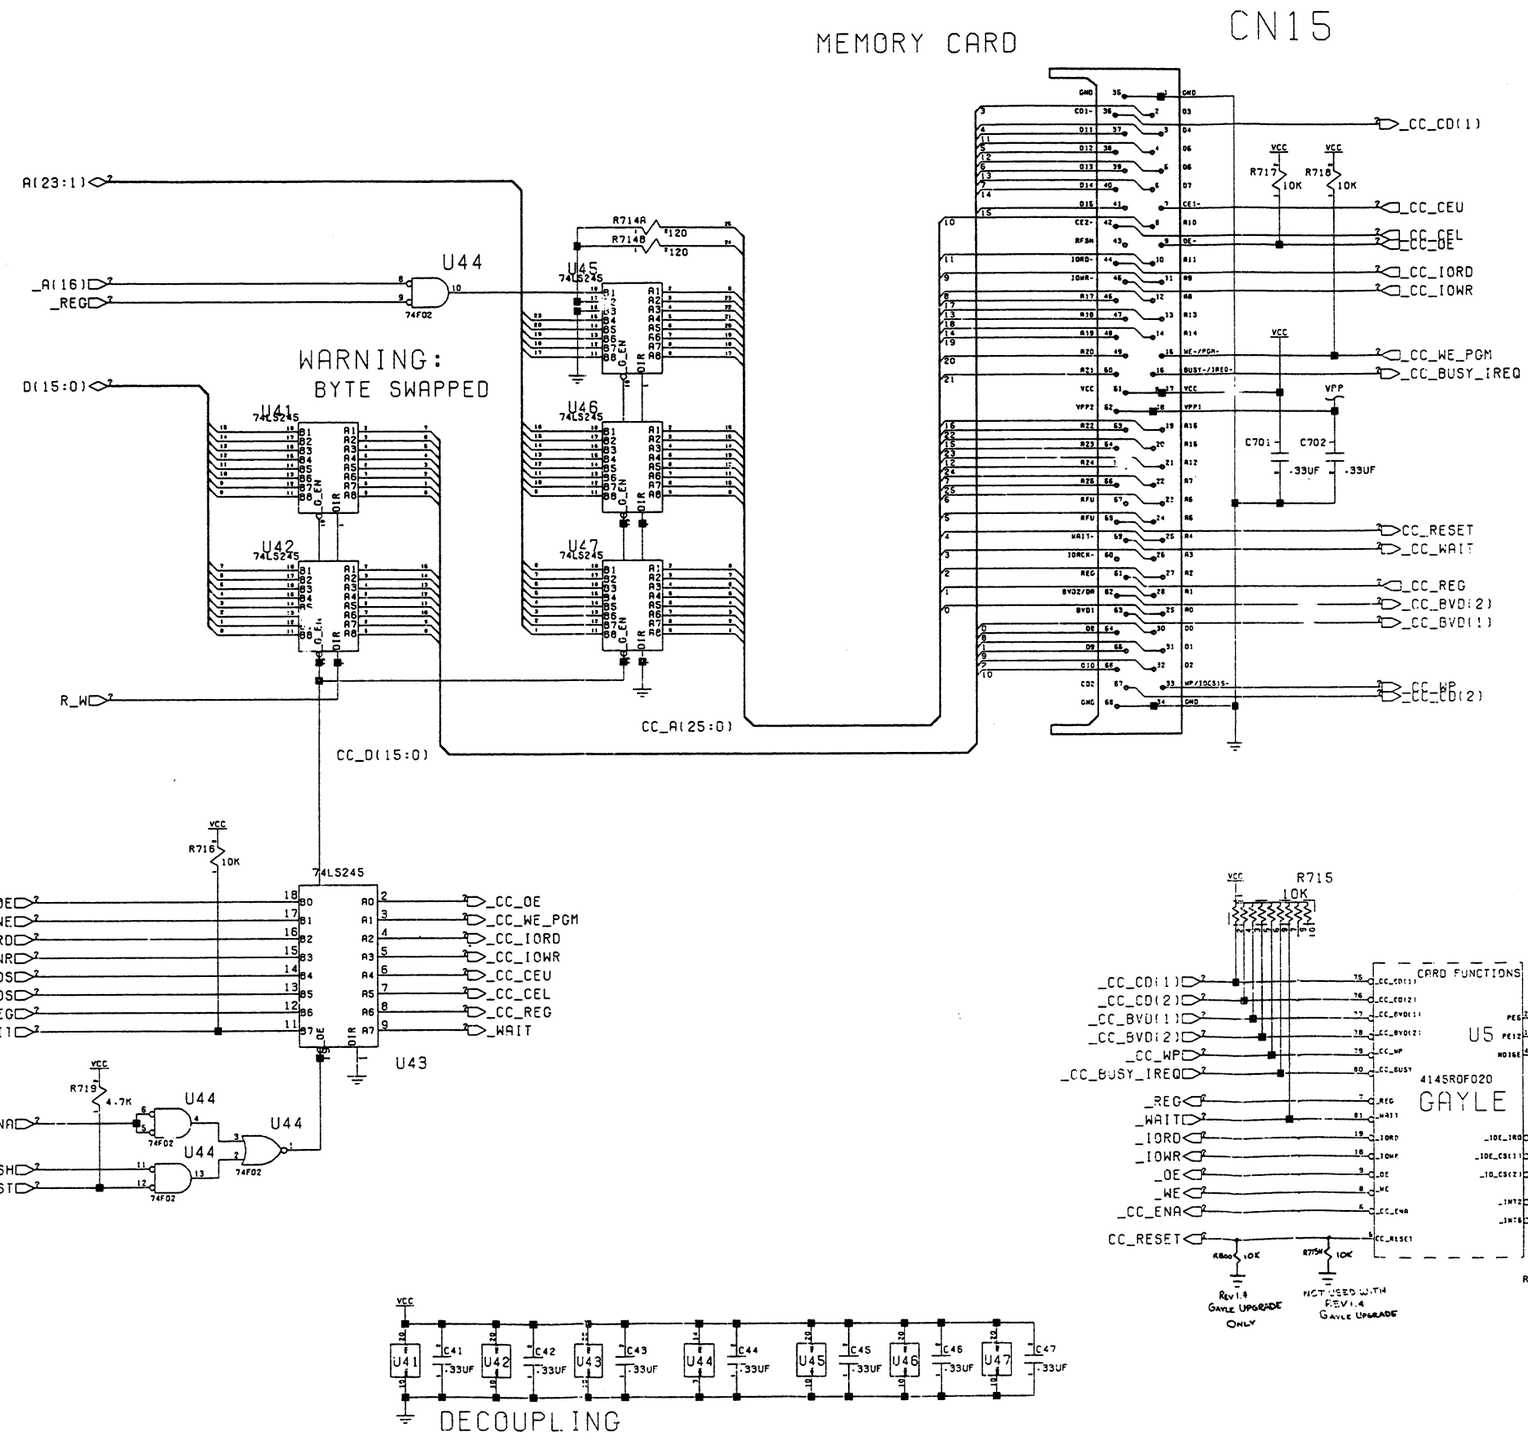
MEMORY CARD
CN15
A[23:1]
_A[16]
_REG
D[15:0]
R_W
U44
74F02
WARNING:
BYTE SWAPPED
U41
74LS245
U42
74LS245
U45
74LS245
U46
74LS245
U47
74LS245
R714A
R714B
120
120
CC_A[25:0]
CC_D[15:0]
_CC_CD(1)
_CC_CEU
_CC_CEL
_CC_OE
_CC_IORD
_CC_IOWR
_CC_WE_PGM
_CC_BUSY_IREQ
_CC_RESET
_CC_WAIT
_CC_REG
_CC_BVD(2)
_CC_BVD(1)
_CC_WP
_CC_CD(2)
VCC
R717
10K
R718
10K
VPP
C701
C702
.33UF
.33UF
R716
10K
74LS245
_OE
_WE
_IORD
_IOWR
_UDS
_LDS
_REG
_CC_WAIT
_CC_OE
_CC_WE_PGM
_CC_IORD
_CC_IOWR
_CC_CEU
_CC_CEL
_CC_REG
_WAIT
U43
R719
4.7K
_CC_ENA
_FLASH
_TEST
R715
10K
CARD FUNCTIONS
_CC_CD(1)
_CC_CD(2)
_CC_BVD(1)
_CC_BVD(2)
_CC_WP
_CC_BUSY_IREQ
_REG
_WAIT
_IORD
_IOWR
_OE
_WE
_CC_ENA
CC_RESET
R800
10K
R715X
10K
U5
4145R0F020
GAYLE
PE5
PE12
NOISE
.33UF
C711
_IOE_IRQ
_IOE_CS(1)
_IOE_CS(2)
XJ1D
XJ1E
_INT2
_INT6
4.7K
REV 1.0 GAYLE UPGRADE ONLY
NOT USED WITH REV 1.4 GAYLE UPGRADE
U41
U42
U43
U44
U45
U46
U47
C41
C42
C43
C44
C45
C46
C47
.33UF
DECOUPLING

MEMORY EXPANSION

P9

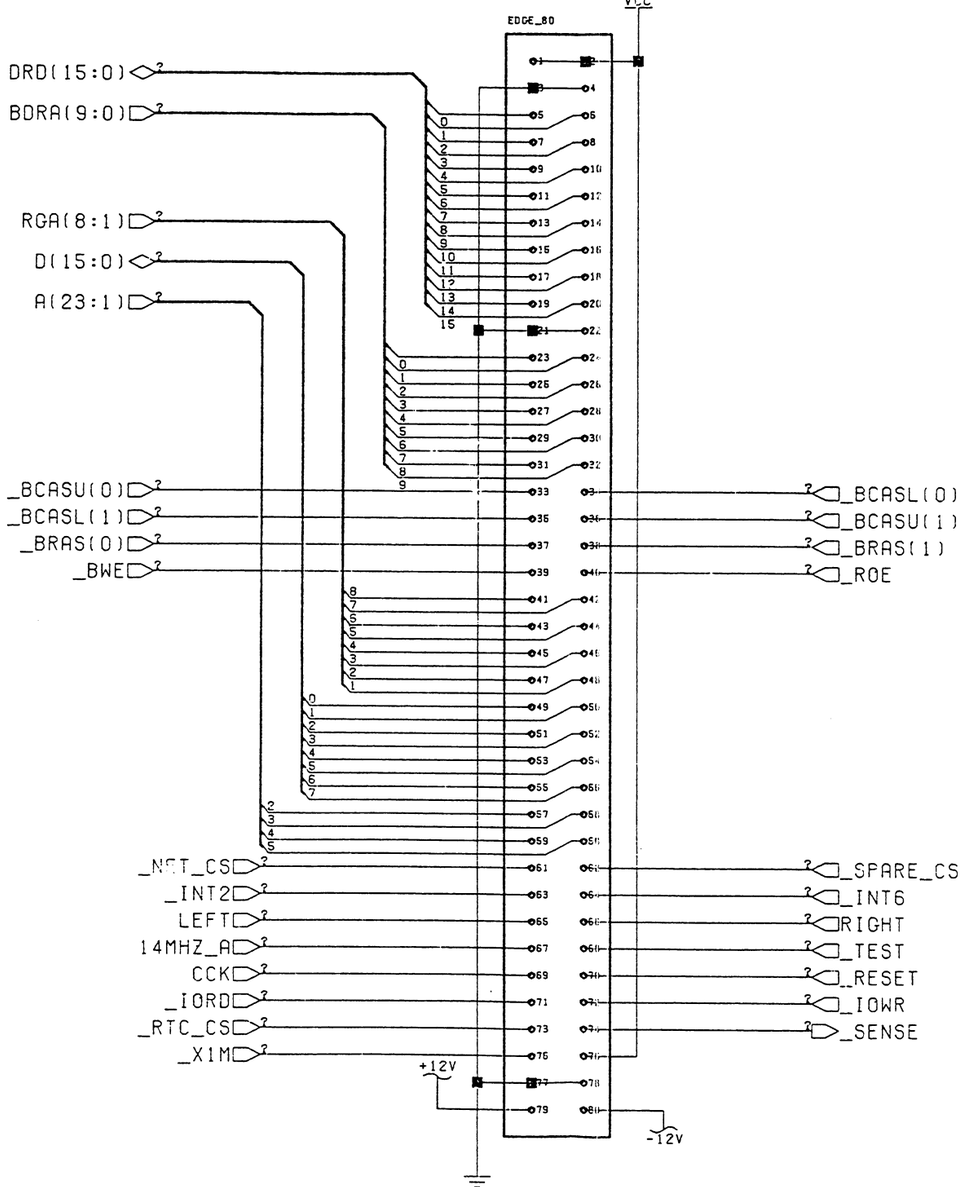

IDE DRIVE

CN16

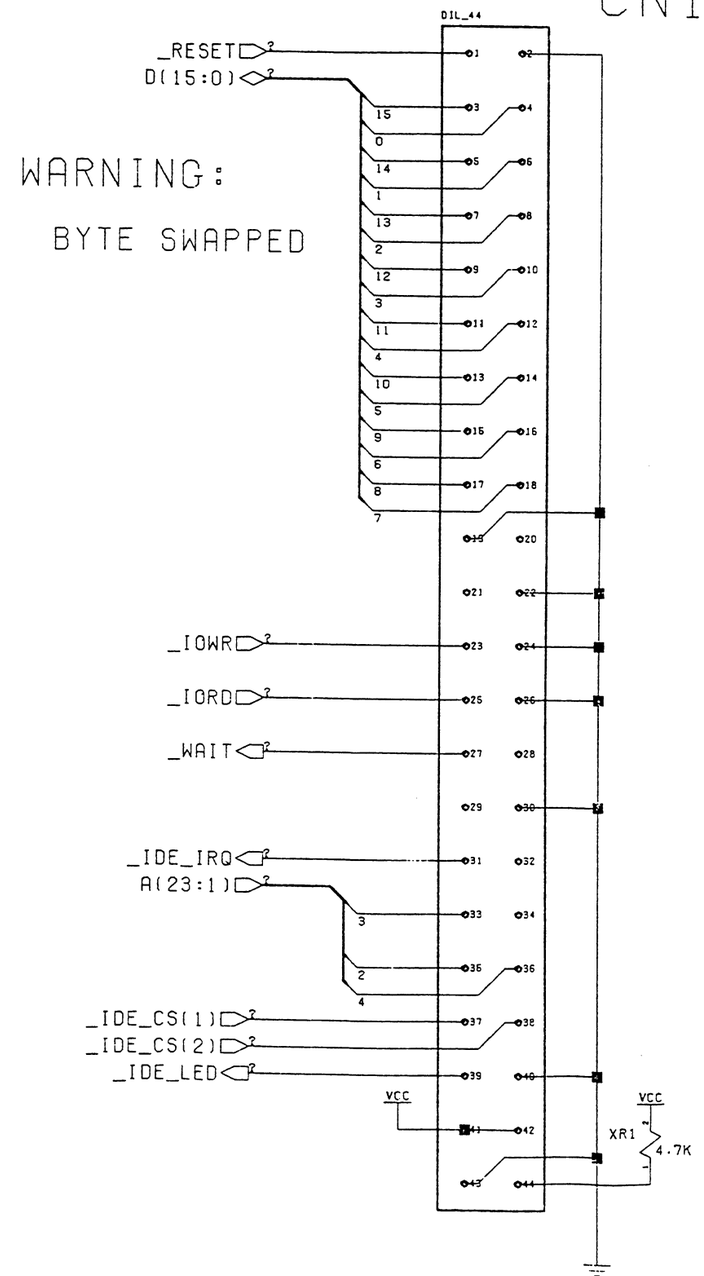

POWER INPUT

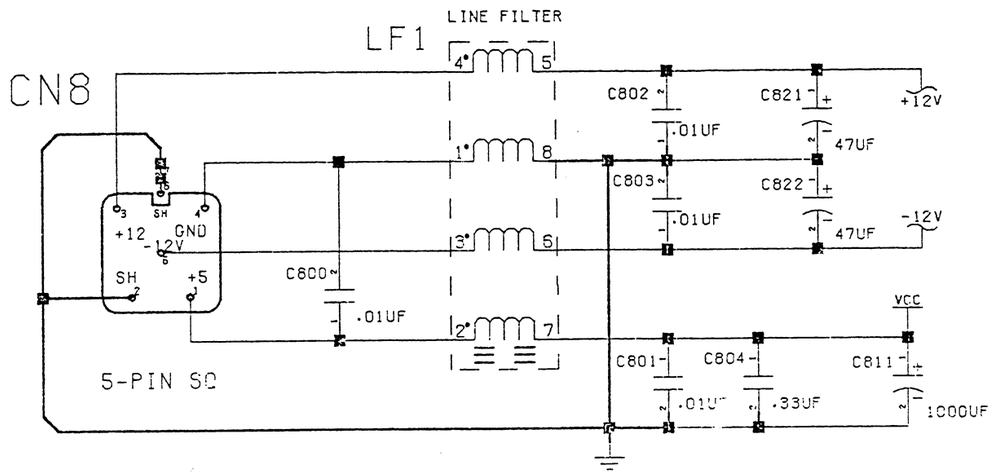

NOTE: HEAVY LINES INDICATE A SINGLE POINT CONNECTION

GROUNDED HOLES, &C.

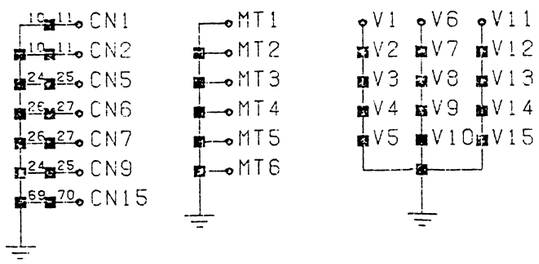

"BUS" TERMINATION